astro

LIGHTING COLLECTION

2021

Introduction

Since 1997, our Founders John Fearon and James Bassant, have shared a passion for British lighting design and a vision to create products with distinctive quality. Obsessive over the details, we refine elements others may overlook, challenging ourselves so we get it just right.

Future-proofed by design, timeless, pared-down aesthetics are what we're known for, using the best possible materials and techniques to make each product uniquely Astro. Balancing high-performance with our commitment to sustainable design, our in-house creative team fuse form with function so every product is created to stand the test of time.

IT Dal 1997, i nostri fondatori John Fearon e James Bassant condividono la passione per il design illuminotecnico inglese ed una vision per la creazione di prodotti con una qualità distintiva. Perfezioniamo elementi che altri possono a volte non considerare, grazie ad una cura maniacale dei dettagli e sfidiamo costantemente noi stessi per ottenere sempre ottimi risultati. Design a prova di futuro ed estetica senza tempo ed essenziale sono ciò che ci contraddistingue: utilizziamo i materiali e le tecniche migliori in grado di rendere ogni prodotto distintamente Astro. Bilanciando elevate prestazioni con il nostro impegno verso il design sostenibile, il nostro team creativo interno coniuga forma e funzionalità permettendo ad ogni prodotto di superare la prova del tempo.

FR Depuis 1997, nos fondateurs, John Fearon et James Bassant, partagent une passion pour la conception des éclairages britanniques et une vision pour créer des produits de qualité unique. Avec un sens obsessif du détail, nous affinons nos processus et des éléments que d'autres pourraient négliger, en relevant le défi de créer la solution la plus aboutie. Une esthétique épurée et intemporelle, à l'épreuve du temps, sont les bases de notre réputation. Grâce à notre choix des meilleurs matériaux et techniques, chacun de nos produits est reconnaissable comme une création Astro unique. Équilibrant des performances de haut niveau et notre engagement pour créer des conceptions durables, notre équipe créative interne fusionne forme et fonction afin que chaque produit résiste à l'épreuve du temps.

DE Unsere Gründer John Fearon und James Bassant teilen seit 1997 eine Leidenschaft für britisches Beleuchtungsdesign und eine Vision zur Herstellung von Produkten von unverwechselbarer Qualität. Wir sind detailbesessen, veredeln Elemente, die andere womöglich übersehen, und stellen höchste Ansprüche an uns selbst für optimale Ergebnisse. Wir sind bekannt für eine bewusst zukunftsorientierte, zeitlos schlichte Ästhetik und verwenden ausschließlich bestmögliche Materialien und Techniken. Jedes Produkt ist unverkennbar Astro. Unser internes Kreativteam verbindet hohe Leistung mit einem Bekenntnis zu nachhaltigem Design und verschmilzt Form und Funktion so zu einem Produkt, das die Zeit überdauert – jedes Mal.

Projects

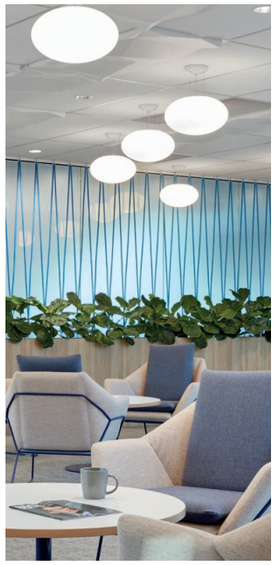

We are proud to play our part in some of the most exciting design projects across the globe. Working closely with our customers and partners, we deliver contemporary, purposeful designs that complement every aspect of luxury living and hospitality, from guest bedrooms and bathrooms to living areas, corridors, and exteriors.

IT Siamo orgogliosi di aver partecipato ad alcuni dei progetti di design più straordinari al mondo. Collaborando strettamente con clienti e partner, forniamo prodotti mirati dallo stile contemporaneo che si adattano ad ogni aspetto di ambienti di lusso ed hotel, dalle camere e sale da bagno degli ospiti, fino alle zone living, corridoi ed esterni.

FR Nous sommes fiers de jouer un rôle dans de nombreux projets de design parmi les plus passionnants au monde. En travaillant en étroite collaboration avec nos clients et nos partenaires, nous créons des designs contemporains et pratiques qui complètent chaque aspect d'un style de vie luxueux, résidentiel ou hôtelier, depuis les chambres, les salles de bain, les espaces de vie, jusqu'aux couloirs et espaces extérieurs.

DE Wir sind stolz auf unsere Beteiligung bei einigen der aufregendsten Designprojekte weltweit. In enger Zusammenarbeit mit unseren Kunden und Partnern liefern wir zeitgemäße, zweckmäßige Designs, die alle Aspekte luxuriöser Lebensführung und der Hotellerie komplementieren: von Gäste- und Badezimmern bis hin zu Wohnbereichen, Fluren und Außenbereichen.



Top Zeppo Pendant 400
Repco HQ, Australia
Left Altea 360 LED
Hard Rock Hotel, UK
Right Enna Square
The Warehouse Hotel,
Singapore

The Collection

BATHROOM



TACOMA
P. 17

CABARET
P. 19



VERSAILLES
P. 21



EPSILON
P. 23



KAPPA
P. 23



KYOTO LED
P. 25



SAGARA
P. 27



MASCALI ROUND
P. 29

INTERIOR



CONE 195 + LAGO 280
P. 33



AVIGNON
P. 35



HASHIRA 300 +400
P. 37



CAMBRIA 180
P. 39



MIURA WALL
P. 41



MIURA SWING ARM
P. 41



SIDE BY SIDE
P. 43



MITSU WALL
P. 45



MITSU SWING ARM
P. 45



EDGE READER MINI
P. 47



ZEPPO READER
P. 49



ENNA SURFACE USB
P. 51



LUCCA
P. 53



FUSE 3
P. 55



BLEND
P. 57



AMAS
P. 59



AMAT
P. 59



PARALLEL
P. 61



MILO 300
P. 63



MITSU FLOOR
P. 65



MITSU TABLE
P. 65



MIURA DESK USB
P. 67



ATELIER DESK
P. 69



HASHIRA PENDANT
P. 71



HASHIRA SURFACE
P. 71



CAMBRIA PENDANT
P. 73



PINHOLE
P. 75



TRIMLESS
P. 77



MINIMA
P. 79



APOLLO
P. 81



ASCOLI TWIN
P. 83



ASCOLI FLUSH
P. 85

CAN 50 FLUSH
P. 85

EXTERIOR

MESSINA 200
P. 89

MESSINA TWIN
P. 89

HARVARD LANTERN
P. 91

HARVARD PENDANT
P. 93

HOMEFIELD PEDESTAL
P. 95

KURO 250
P. 97

KURO 450
P. 97

AVA 400
P. 99

INCLINE
P. 101

INCLINE TWIN
P. 101

MYOS
P. 103

BAYVILLE 900
P. 105

BAYVILLE 900 TWIN
P. 105

JURA SPOT
P. 107

JURA SPIKE SPOT
P. 107

Hashira Collection

Hashira 300

Hashira 400

Hashira surface 250

Hashira pendant

See pages 37 + 71

Miura Collection

Miura swing arm

Miura wall

Miura desk USB

See pages 41 + 67



Mitsu Collection

Mitsu wall

Mitsu swing arm

Mitsu table

Mitsu floor

See pages 45 + 65

Cambria Collection

Cambria 180

Cambria 380

Cambria 480

Cambria 580

Cambria pendant

See pages 39 + 73
Please see website for full range

Bathroom

Tacoma





Single



Twin



Single Grande



Tacoma shade options

MB PCh AB

Single 3W Max LED G9 excl.
Single grande 3W Max LED G9 excl.
Twin 2 X 3W Max LED G9 excl.
IP44 Zone 2, 3 Class I

Technical data p. 117 + 118



Cabaret

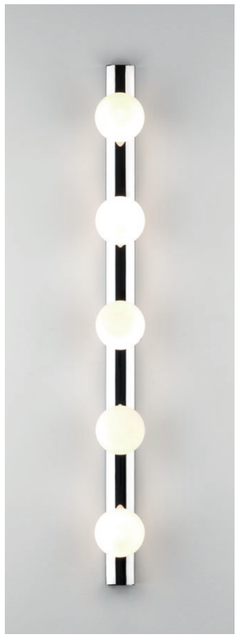

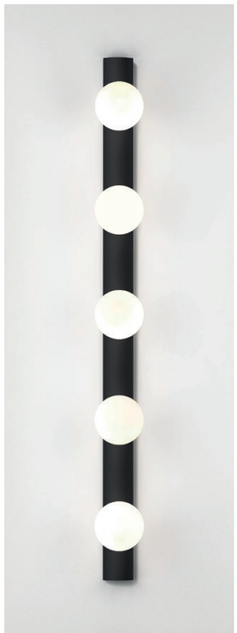

5 II

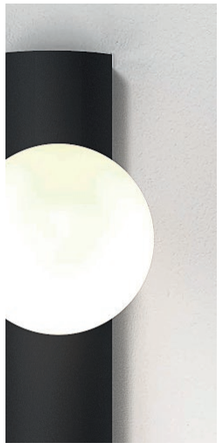



4 II

MB PCh

4 II 4 x 3W Max LED G9 excl.
5 II 5 x 3W Max LED G9 excl.
IP44 Zone 2, 3 Class II

Technical data p. 110

Versailles phase dimmable







250





400





600 370



250

Br PCh MG

250 Integral 4.5W LED 3000K 320Lm 80CRI
400 Integral 7.1W LED 3000K 658Lm 80CRI
IP44 Zone 2, 3 Class II
Mains 230V

Technical data p. 119



Epsilon



Kappa

Epsilon + Kappa matt black



Kappa

MB

Epsilon Integral 3.4W LED 3000K 83Lm 90CRI
Kappa Integral 3.4W LED 3000K 98Lm 90CRI
IP44 Zone 2, 3 Class II
Mains 230V



Epsilon PCh



Kappa PCh

Technical data p. 111 + 113

Kyoto LED matt black

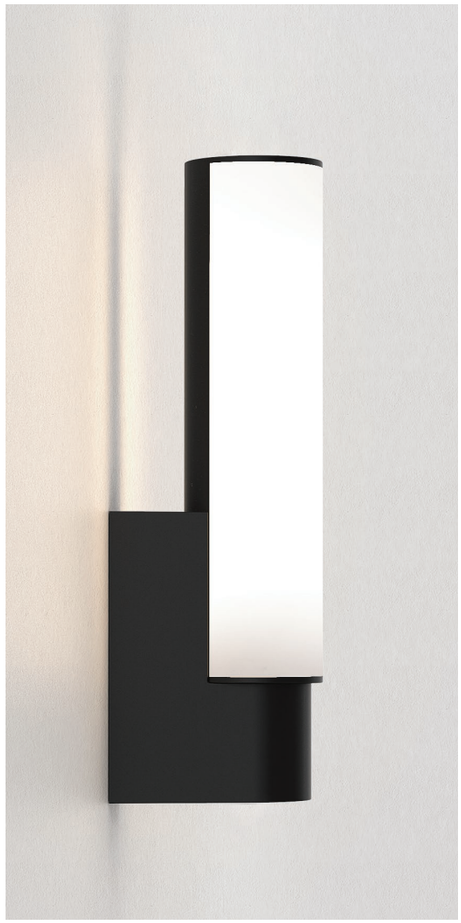

MB

Integral 7.9W LED
2700K 318Lm 80CRI
IP44 Zone 2, 3 Class II
Mains 230V



PCh

Technical data p. 113







Sagara matt black



MB

3W Max LED G9 excl.

IP44 Zone 2, 3 Class II



PCh

Technical data p. 117



Mascali Round matt black





MB

Integral 5.3W LED
2700K 76Lm 90CRI
IP44 Zone 2, 3 Class II
Mains 230V



MN



PCh

Technical data p. 114

Interior

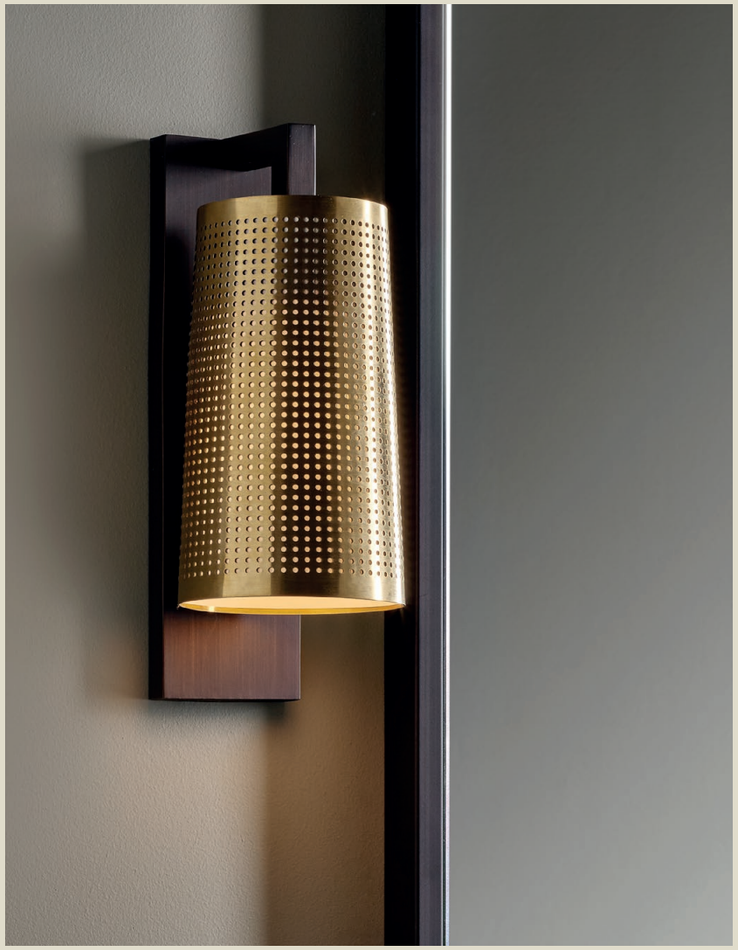

Cone 195 + Lago 280





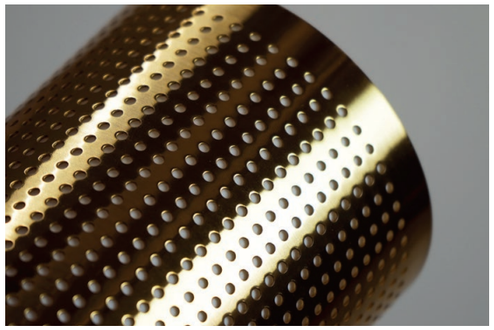





WG + WF

NB

Cone 195 shade is compatible
with the Lago 280 (sold separately)

Technical data p. 113

Avignon



Square 500



Round 375





Round 525





Square 300





Square 500





Br AB

Round 375 12W Max LED E27/ES excl.
Round 525 2 X 12W Max LED E27/ES excl.
Square 300 12W Max LED E27/ES excl.
Square 500 2 X 12W Max LED E27/ES excl.
IP20 Class I

Technical data p. 109

Hashira 300 + 400



300



400

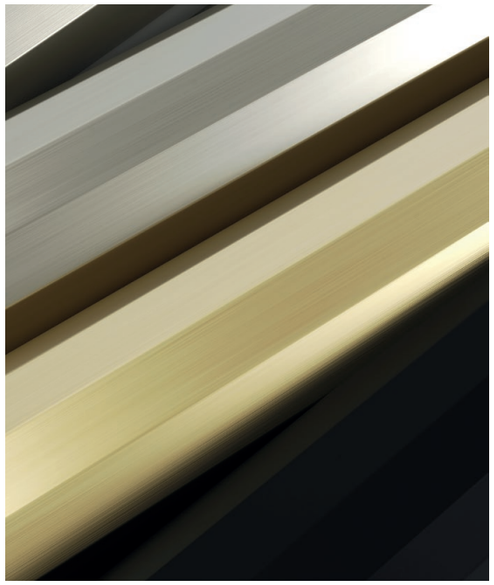



Pendant + Surface 250

MB MN MG

2 x 6W Max LED GU10 excl.

IP20 Class I

Technical data p. 111 + 112

Cambria 180 + backplate 3









PF WF WPF

Backplate 3

12W Max LED E27/ES excl.

IP20 Class I

Shades sold separately







Cambria collection

Technical data p. 110



Miura wall + swing arm



Wall



Swing arm









MB MN MG

Integral 7.5W LED

IP20 Class I

Shades sold separately



Desk USB



Cone 105 shade

Technical data p. 115 + 116

Side by Side grande USB





MB MN Br

12W Max LED E27/ES excl. + integral 3.6W LED

2700K 134Lm 9090CRI

IP20 Class I

Shades sold separately



Without USB



Tapered round 250 shade

Technical data p. 117



Mitsu wall + swing arm









MN Br

12W Max LED E27/ES excl.

IP20 Class I

Shades sold separately







Table + Floor

Cone 173 shade

Technical data p. 115

Edge Reader Mini

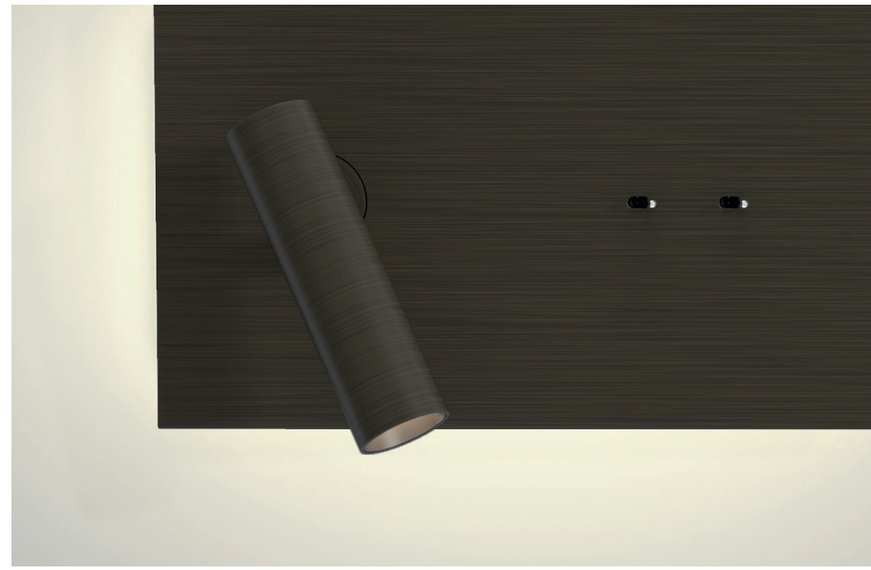



MN Br

Integral 9.7W + 4.1W LED
2700K 112 + 149Lm 80 + 90CRI
IP20 Class I
Mains 230V



MB + MW





Edge reader

Technical data p. 111

Zeppo reader



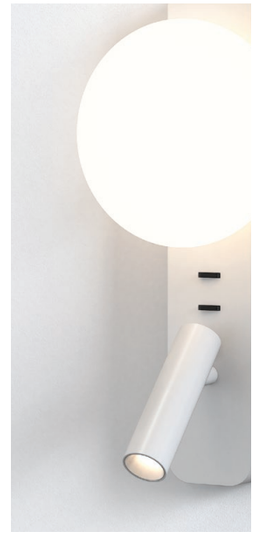

MB MN MW

3W Max LED G9 excl. + integral 4.1W LED
2700K 149Lm 90CRI
IP20 Class I
Mains 230V



Zeppo collection

Technical data p. 119

Enna Surface USB









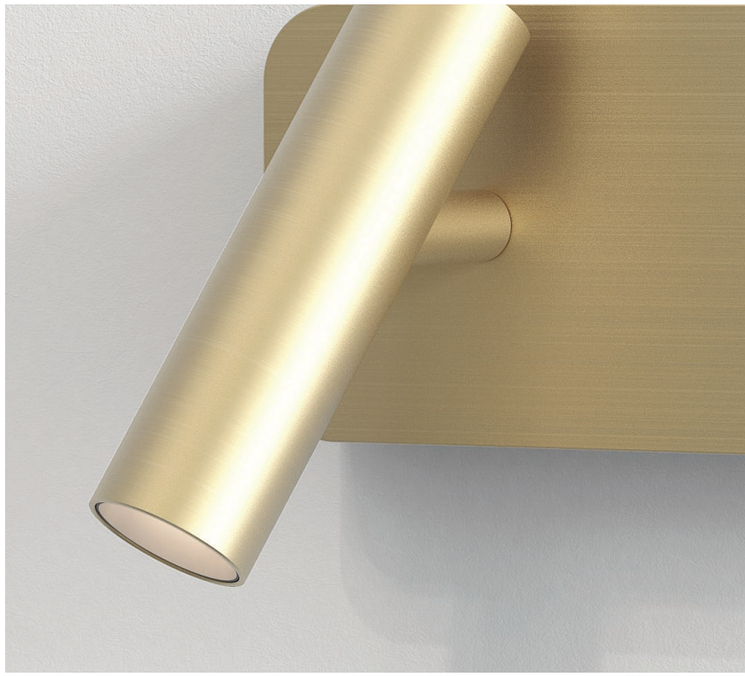



Enna collection

MB MN MG MW

Integral 3.6W LED
2700K 134Lm 90CRI
IP20 Class I
Mains 230V

I

Technical data p. 111

Lucca



Surface



Unswitched







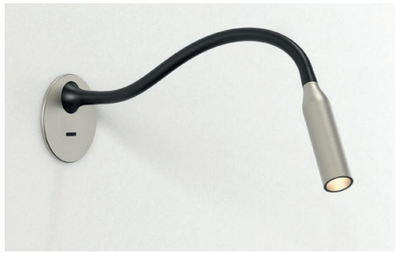

Recessed



Unswitched







MB MN MG Br

Integral 3.6W LED
2700K 124Lm 90CRI
IP20 Class I
Mains 230V

The Lucca Surface and Recessed unswitched variants are available by special order. A minimum order quantity of 100pcs applies.

Technical data p. 113



Fuse 3















MB MN MG Br PCh MW

Integral 3.6W LED
2700K 151Lm 90CRI
IP20 Class I
Mains 230V

I



USB

Technical data p. 111

Blend



P

12W Max LED E27/ES excl.

IP20 Class I

Technical data p. 110

Amas + Amat 320







Amas 320



Amat 320

C

12W Max LED E27/ES excl.

IP20 Class II

Technical data p. 108



Parallel



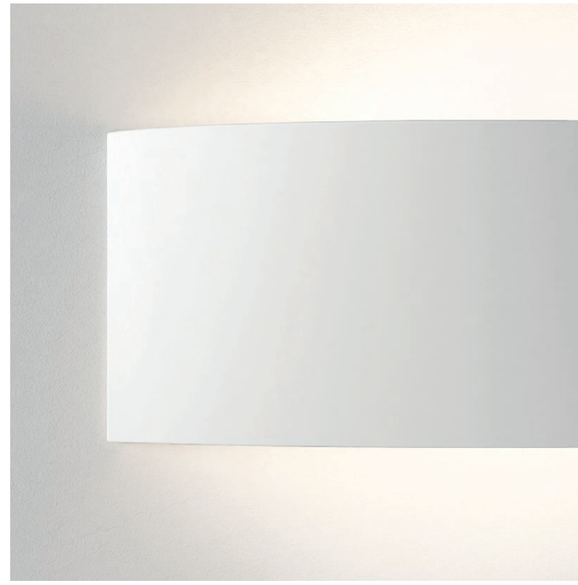

C

12W Max LED E27/ES excl.

IP20 Class II

Technical data p. 116

Milo 300



GW

12W Max LED E27/ES excl.

IP20 Class II

Technical data p. 114

Mitsu table + floor





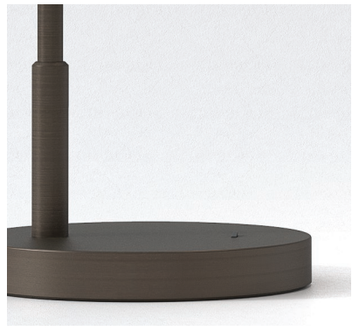









MN Br

12W Max LED E27/ES excl.

IP20 Class I

Shade sold separately



Wall + Swing arm





Cone 173 shade

Technical data p. 115







Miura desk USB





Wall + Swing arm





Cone 105 shade

MN MG

Integral 7.5W LED
2700K 367Lm 80CRI
IP20 Class II
Mains 230V
Shade sold separately

Technical data p. 115







Atelier desk



MB MW

12W Max LED E27/ES excl.

IP20 Class II

I



Atelier collection

Technical data p. 109



Hashira pendant + surface 250

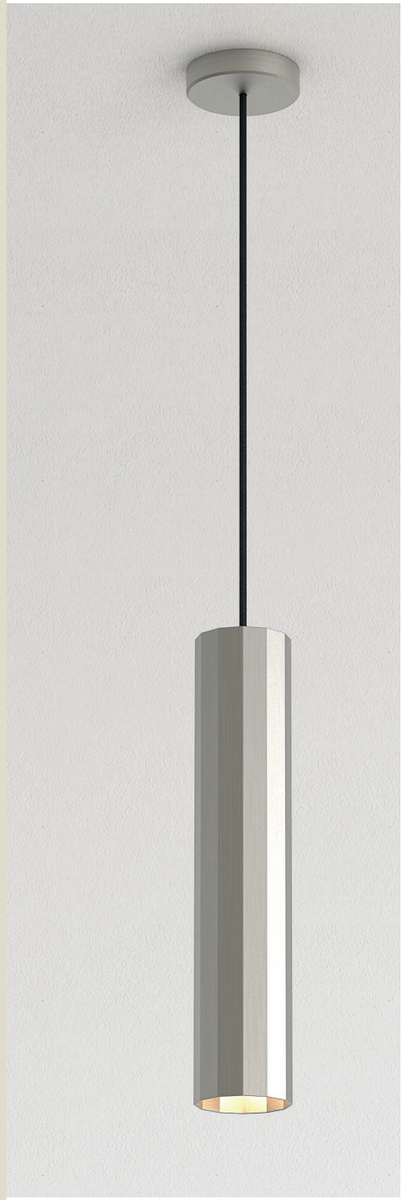

Pendant





Hashira 300 + 400







Surface 250

MB MN MG

6W Max LED GU10 excl.

IP20 Class I

Technical data p. 112

Cambria pendant



600





Pendant

Shades







500







600



Cambria collection

MN MW

3 X 12W Max LED E27/ES excl.

IP20 Class I

Shades sold separately

Technical data p. 110



Pinhole




Slimline fixed fire rated IP65
6W Max LED GU10
IP65 Zone 1, 2, 3
Class II
Fire rated: 30 min, 60 min & 90 min




Slimline adjustable fire rated
6W Max LED GU10
IP20 Zone 3
Class II
Fire rated: 30 min, 60 min & 90 min



Slimline flush fixed fire rated IP65
6W Max LED GU10
IP65 Zone 1, 2, 3
Class II
Fire rated: 30 min, 60 min & 90 min



Slimline flush adjustable fire rated
6W Max LED GU10
IP20 Zone 3
Class II
Fire rated: 30 min, 60 min & 90 min




Twin + Triple adjustable
2 x 6W Max + 3 x 6W Max LED GU10
IP20 Zone 3
Class II

MW

Technical data p. 116 + 117



Trimless



Slimline fixed fire rated IP65
6W Max LED GU10
IP65 Zone 1, 2, 3
Class II
Fire rated: 30 min, 60 min & 90 min



Slimline adjustable fire rated
6W Max LED GU10
IP20 Zone 3
Class II
Fire rated: 30 min, 60 min & 90 min





Fixed
6W Max LED GU10
IP20 Zones 3
Class II





Adjustable
6W Max LED GU10
IP20 Zone 3
Class II





Twin adjustable
2 x 6W Max LED GU10
IP20 Zone 3
Class II

MW

Technical data p. 118 + 119



Minima



Slimline fixed fire rated IP65
6W Max LED GU10
IP65 Zone 1, 2, 3
Class II
Fire rated: 30 min, 60 min & 90min



Slimline 25 fire rated IP65
6W Max LED GU10
IP65 Zone 1, 2, 3
Class II
Fire rated: 30 min, 60 min & 90 min



Slimline adjustable fire rated
6W Max LED GU10
IP20 Zone 3
Class II
Fire rated: 30 min, 60 min & 90 min

MB MW

Technical data p. 114 + 115

Apollo















MB | MW

6W Max LED GU10 excl.

IP20 Class I

Technical data p. 108

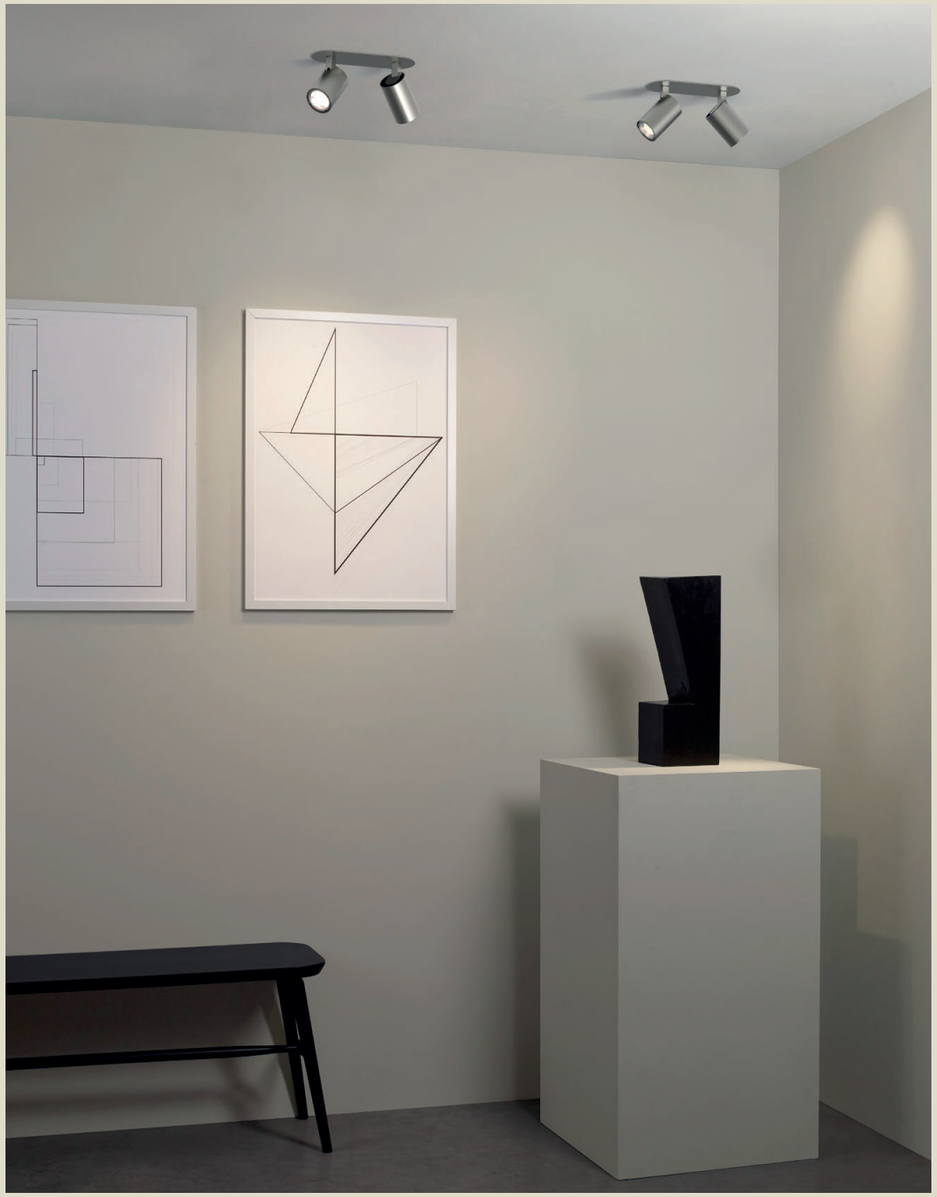

Ascoli twin recessed









MB MN Br TW

2 x 6W Max LED GU10 excl.

IP20 Class I









Ascoli collection

Technical data p. 109

Ascoli + Can 50 flush fire-rated



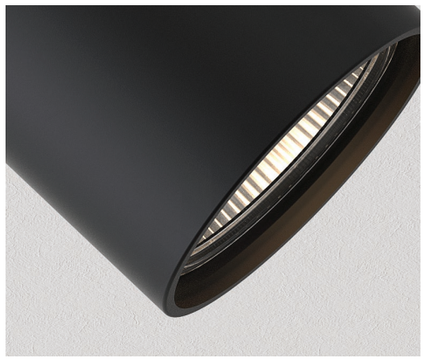



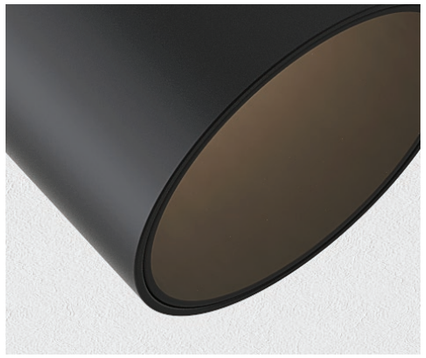



MB TW

Ascoli flush fire rated

6W Max LED GU10 excl.

IP20 Class I

Fire rated: 30 min, 60 min & 90 min



MB MW

Can 50 flush fire rated

Integral 7.5W LED

IP20 Class I

Fire rated: 30 min, 60 min & 90 min



Can collection



Ascoli collection

Technical data p. 109 + 110

Exterior



Messina 200 + twin





TB

200 12W Max LED E27 excl.
Twin 2 x 12W Max LED E27 excl.
IP44 Class I



Messina collection

Technical data p. 114

Harvard lantern





TB

12W Max LED E27 excl.

IP44 Class I



Harvard collection

Technical data p. 112

Harvard pendant



TB

12W Max LED E27 excl.

IP44 Class I



Harvard collection

Technical data p. 111



Homefield pedestal



TB

12W Max LED E27 excl.

IP44 Class I





Homefield collection

Technical data p.112





250



450



Kuro 250 + 450



TB

Integral 1.3W LED
2700K 145Lm 80CRI
IP44
Solar powered 5V

USB charging plug available separately

Technical info p. 113

Ava 400







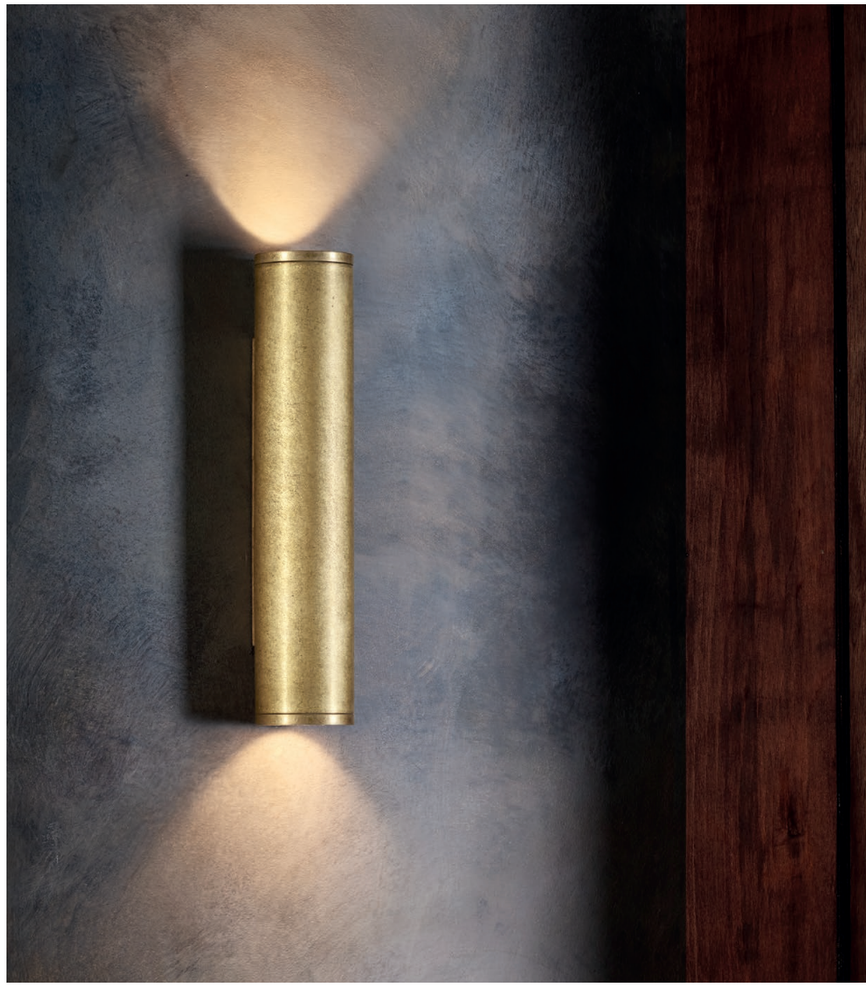

TB BSS CB

2 x 6W Max LED GU10 excl.

IP44 Class I





200 + 300

Technical data p. 109

Incline single + twin





CB

Single Integral 8.2W LED 3000K 485Lm 80CRI
Twin Integral 14.2W LED 3000K 1075Lm 80CRI
IP65 Class I
Mains 230V

Technical data p. 112

Myos









Extension pole

TB

Integral 8W LED
3000K 312Lm 90CRI
IP65
700mA constant current driver required
Extension pole sold separately

Technical data p. 116

Bayville spike spot 900 + 900 twin









Bayville collection

TB

900 Integral 8.1W LED 3000K 490Lm 80CRI

900 twin Integral 15.7W LED 3000K 1070Lm 80CRI

IP66 Class I

Mains 230V

Technical data p. 110





Jura single spot + spike spot



CB

6W Max LED GU10 excl.

Single IP44 Class I

Spike spot IP65 Class I



Jura collection

Technical data p. 112

Finishes



AMAS 320 P.59

Interior	Unswitched	Ceramic	○ **C**	1431001
12W Max LED E27/ES excl.	IP20	1.36kg		
Max lamp length 120mm	CE Class II	Horizontal wall mount		
Dimmable	No driver required			



AMAT 320 P.59

Interior	Unswitched	Ceramic	○ **C**	1432001
12W Max LED E27/ES excl.	IP20	1.35kg		
Max lamp length 120mm	CE Class II	Horizontal wall mount		
Dimmable	No driver required			



APOLLO 100 RECESSED P.81

Interior	CE Class I	Tilt adjustable angle 90°	○ **TW**	1422016
6W Max LED GU10 excl.	No driver required	Rotation adjustable angle 330°	● **MB**	1422017
Max lamp length 73mm	Aluminium	Round cut out: Ø44mm		
Dimmable	0.44kg	Recess depth: 55mm		
IP20	Ceiling mount	Plaster board installation only		



APOLLO TRACK P.81

Interior	IP20	0.34kg	○ **TW**	1422022
6W Max LED GU10 excl.	CE Class II	Ceiling track mount	● **MB**	1422023
Max lamp length 79mm	No driver required	Tilt adjustable angle 90°		
Dimmable	Aluminium	Rotation adjustable angle 330°		



APOLLO SINGLE P.81

Interior	IP20	0.57kg	○ **TW**	1422001
6W Max LED GU10 excl.	CE Class I	Wall/Ceiling mount	● **MB**	1422002
Max lamp length 79mm	No driver required	Tilt adjustable angle 90°		
Dimmable	Aluminium	Rotation adjustable angle 330°		



APOLLO TWIN P.81

Interior	IP20	1.44kg	○ **TW**	1422004
2 X 6W Max LED GU10 excl.	CE Class I	Wall/Ceiling mount	● **MB**	1422005
Max lamp length 79mm	No driver required	Tilt adjustable angle 90°		
Dimmable	Aluminium	Rotation adjustable angle 330°		



APOLLO TRIPLE BAR P.81

Interior	IP20	2.11kg	○ **TW**	1422007
3 X 6W Max LED GU10 excl.	CE Class I	Wall/Ceiling mount	● **MB**	1422008
Max lamp length 79mm	No driver required	Tilt adjustable angle 90°		
Dimmable	Aluminium	Rotation adjustable angle 330°		



APOLLO FOUR BAR P.81

Interior	IP20	3.41kg	○ **TW**	1422010
4 X 6W Max LED GU10 excl.	CE Class I	Wall/Ceiling mount	● **MB**	1422011
Max lamp length 79mm	No driver required	Tilt adjustable angle 90°		
Dimmable	Aluminium	Rotation adjustable angle 330°		



APOLLO FIVE BAR P.81

Interior	IP20	4.45kg	○ **TW**	1422013
5 X 6W Max LED GU10 excl.	CE Class I	Wall/Ceiling mount	● **MB**	1422014
Max lamp length 79mm	No driver required	Tilt adjustable angle 90°		
Dimmable	Aluminium	Rotation adjustable angle 330°		



ASCOLI FLUSH FIRE-RATED P.85

Interior	CE Class I	Rotation adjustable angle 330°	○ **TW**	1286095
6W Max LED GU10 excl.	No driver required	Round cut out: Ø79mm	● **MB**	1286096
Max lamp length 57mm	Mild steel	Recess depth: 60mm		
Dimmable	0.53kg	Install into new ceiling		
Unswitched	Ceiling mount	Fire rating : 30 min, 60 min & 90 min EN1365-2		
IP20	Tilt adjustable angle 90°			



ASCOLI TWIN RECESSED P.83

Interior	CE Class I	Rotation adjustable angle 330°	○ **TW**	1286097
2 X 6W Max LED GU10 excl.	No driver required	Oval cut out: 184mm x 44mm	● **MB**	1286100
Max lamp length 57mm	Mild steel	Recess depth: 80mm	● **MN**	1286099
Dimmable	0.9kg	Plaster board installation only	● **Br**	1286098
Unswitched	Ceiling mount			
IP20	Tilt adjustable angle 90°			



ATELIER DESK P.69

Interior	Switched	3.5kg	● **MB**	1224061
12W Max LED E27 excl.	IP20	Tilt adjustable angle 180°	○ **MW**	1224062
Max lamp length 115mm	CE Class II	Rotation adjustable angle 330°		
Not dimmable	Aluminium	Wire length 3000mm		



AVA 400 P.99

Outdoor	Unswitched	TB-Aluminium/BSS-Stainless Steel /CB-Brass	● **TB**	1428013
2 X 6W Max LED GU10 excl.	IP44		● **BSS**	1428014
Max lamp length 79mm	CE Class I	TB-1.3kg/BSS-2.5kg/CB-2.7kg	● **CB**	1428015
Dimmable	No driver required	Vertical wall mount		



AVIGNON ROUND 375 P.35

Interior	Unswitched	Zinc	● **Br**	1427001
12W Max LED E27/ES excl.	IP20	3.34kg	● **AB**	1427002
Max lamp length 145mm	CE Class I	Vertical wall mount		
Dimmable	No driver required			



AVIGNON ROUND 525 P.35

Interior	Unswitched	Zinc	● **Br**	1427003
2 x 12W Max LED E27/ES excl.	IP20	4.5kg	● **AB**	1427004
Max lamp length 145mm	CE Class I	Vertical wall mount		
Dimmable	No driver required			



AVIGNON SQUARE 300 P.35

Interior	Unswitched	Zinc	● **Br**	1427009
12W Max LED E27/ES excl.	IP20	3.56kg	● **AB**	1427010
Max lamp length 145mm	CE Class I	Vertical wall mount		
Dimmable	No driver required			



AVIGNON SQUARE 500 P.35

Interior	Unswitched	Zinc	● **Br**	1427011
2 x 12W Max LED E27/ES excl.	IP20	5.52kg	● **AB**	1427012
Max lamp length 145mm	CE Class I	Vertical wall mount		
Dimmable	No driver required			



BAYVILLE SPIKE SPOT 900 P.105

Exterior	No driver required	3-step Macadam ellipse	● **TB**	1401012
Integral 8.1W LED	Aluminium	LED lifetime 40,000 hrs		
490LM 3000K 80CRI	1.46kg	Supply frequency 50/60 Hz		
Dimmable: phase leading + trailing	Ground/Floor installation	Supply voltage 210-250V		
Unswitched	Tilt adjustable angle 90°	Driver lifetime 40,000 hrs		
IP66	Rotation adjustable angle 330°	Efficacy 60.5 lm/W		
CE Class I	Beam angle 35°	Trailing wire 2,500mm		



BAYVILLE SPIKE SPOT 900 TWIN P.105

Exterior	No driver required	3-step Macadam ellipse	● **TB**	1401013
Integral 15.7W LED	Aluminium	LED lifetime 40,000 hrs		
1070LM 3000K 80CRI	1.72kg	Supply frequency 50/60 Hz		
Dimmable: phase leading + trailing	Ground/Floor installation	Supply voltage 210-250V		
Unswitched	Tilt adjustable angle 90°	Driver lifetime 40,000 hrs		
IP66	Rotation adjustable angle 330°	Efficacy 68 lm/W		
CE Class I	Beam angle 35°	Trailing wire 2,500mm		



BLEND P.57

Interior	Unswitched	Plaster	○ **P**	1439001
12W Max LED E27/ES excl.	IP20	2.3kg		
Max lamp length 120mm	CE Class I	Horizontal wall mount		
Dimmable	No driver required			



CABARET 4 II P.19

Interior/Bathroom	Unswitched	Mild Steel	● **MB**	1087007
4 x 3W Max LED G9 excl.	IP44 Zone 2, 3	1.24kg	● **PCh**	1087009
Max lamp length 51mm	CE Class II	Horizontal/Vertical wall mount		
Dimmable	No driver required			



CABARET 5 II P.19

Interior/Bathroom	Unswitched	Mild Steel	● **MB**	1087008
5 x 3W Max LED G9 excl.	IP44 Zone 2, 3	1.57kg	● **PCh**	1087010
Max lamp length 51mm	CE Class II	Horizontal/Vertical wall mount		
Dimmable	No driver required			



CAMBRIA PENDANT P.73

Interior	Unswitched	Mild Steel	○ **MW**	1421012
3 x 12W Max LED E27/ES excl.	IP20	1.18kg	● **MN**	1421013
Max lamp length 130mm	CE Class I	Ceiling mount		
Dimmable	Wire length 2000mm	Shade sold separately		

H.180 W.315 D.120	**CAMBRIA 180 SHADE** / Polycotton / Backplate 3 sold separately (1367003)	**WF**	5038007	**WP**	5038010	**PF** 5038009
H: 190 Ø: 500	**CAMBRIA 500 SHADE** / Polycotton / Diffuser included	**WF**	5038001	**WP**	5038003	**PF** 5038004
H: 190 Ø: 600	**CAMBRIA 600 SHADE** / Polycotton / Diffuser included	**WF**	5038002	**WP**	5038005	**PF** 5038006



CAN 50 FLUSH FIRE-RATED P.85

Interior	Aluminium	Supply frequency 50/60 Hz	○ **MW**	1396017
Integral 7.5W LED	0.47kg	Supply voltage 210-250V	● **MB**	1396018
525LM 3000K 80CRI	Ceiling installation	Driver lifetime 40,000 hrs		
Dimmable: phase leading + trailing	Tilt adjustable angle 90°	Efficacy 70 lm/W		
Unswitched	Rotation adjustable angle 330°	Round cut out: Ø79mm		
IP20	Beam angle 33.1°	Recess depth: 60mm		
CE Class I	3-step Macadam ellipse	Fire rating: 30 min, 60 min & 90 min EN1365-2		
No driver required	LED lifetime 40,000 hrs			



EDGE READER MINI P.47

Interior	CE Class I	2610-2710K Macadam ellipse	● **Br**	1352025
Integral 9.7W + 4.1W LED	No driver required	LED lifetime 53,000 hrs	● **MN**	1352026
Reader 112LM 2700K 80CRI	Zinc	Supply frequency 47/63 Hz		
Backlight 149LM 2700K 90CRI	1.34kg	Supply voltage 100-240V		
Not dimmable	Horizontal/vertical wall mount	Driver lifetime 20,000 hrs		
Switched	Tilt adjustable angle 90°	Mains 230V		
IP20	Rotation adjustable angle 330°	Efficacy 9 lm/W		



ENNA SURFACE USB P.51

Interior	No driver required	3-step Macadam ellipse	● **MB**	1058153
Integral 3.6W LED	Zinc	LED lifetime 60,000 hrs	○ **MW**	1058154
134LM 2700K 90CRI	1.1kg	Supply frequency 50/60 Hz	● **MN**	1058155
Not dimmable	Horizontal/vertical wall mount	Supply voltage 100-277V	● **MG**	1058156
Switched	Tilt adjustable angle 90°	Driver lifetime 30,000 hrs		
IP20	Rotation adjustable angle 330°	Mains 230V		
CE Class I	Beam angle 18°	Efficacy 37 lm/W		



EPSILON LED P.23

Bathroom	CE Class II	LED lifetime 60,000 hrs	● **MB**	1124007
Integral 3.4W LED	No driver required	Supply frequency 50/60 Hz		
83LM 3000K 90CRI	Zinc	Supply voltage 100-277V		
Not dimmable	0.69kg	Driver lifetime 30,000 hrs		
Unswitched	Wall mount - uplight/downlight	Mains 230V		
IP44	3-step Macadam ellipse	Efficacy 24 lm/W		



FUSE 3 P.55

Interior	Mild Steel	Supply frequency 50/60 Hz	○ **MW**	1215122
Integral 3.6W LED	0.8kg	Supply voltage 100-277V	● **MB**	1215123
151LM 2700K 90CRI	Horizontal/ Vertical wall mount	Driver lifetime 30000 hrs	● **PCh**	1215124
Not dimmable	3-step Macadam ellipse	Efficacy 42 lm/W	● **MN**	1215125
Switched	Tilt adjustable angle 90°	Oval cut out: 180mm x 54mm	● **Br**	1215126
IP20	Rotation adjustable angle 330°	Recess depth: 60mm	● **MG**	1215127
CE Class I	Beam angle 18°			
No driver required	LED lifetime 60000 hrs			



HARVARD LANTERN P.91

Exterior	Unswitched	Stainless Steel	● **TB**	1402011
12W Max LED E27/ES excl.	IP44 Zone 2, 3	3.66kg	**FG**	6030003
Max lamp length 270mm	CE Class I	Vertical wall mount		
Dimmable	No driver required			



HARVARD PENDANT P.93

Exterior	Unswitched	Stainless Steel	● **TB**	1402013
12W Max LED E27/ES excl.	IP44 Zone 2, 3	3.36kg	**FG**	6030003
Max lamp length 270mm	CE Class I	Ceiling mount		
Dimmable	No driver required	Wire length 1800mm		



HASHIRA 300 P.37

Interior	Unswitched	Aluminium	● **MB**	1442001
2 x 6W Max LED GU10 excl.	IP20	1.06kg	● **MN**	1442005
Max lamp length 80mm	CE Class I	Vertical wall mount	● **MG**	1442006
Dimmable	No driver required			



HASHIRA 400 P.37

Interior	Unswitched	Aluminium	**MB**	1442002
2 x 6W Max LED GU10 excl.	IP20 Zone 3	1.39kg	**MN**	1442007
Max lamp length 80mm	CE Class I	Vertical wall mount	**MG**	1442008
Dimmable	No driver required			



HASHIRA PENDANT P.71

Interior	Unswitched	Aluminium	**MB**	1442004
6W Max LED GU10 excl.	IP20	1.92kg	**MN**	1442011
Max lamp length 80mm	CE Class I	Ceiling mount	**MG**	1442012
Dimmable	No driver required	Wire length 2500mm		



HASHIRA SURFACE 250 P.71

Interior	Unswitched	Aluminium	**MB**	1442003
6W Max LED GU10 excl.	IP20	0.94kg	**MN**	1442009
Max lamp length 80mm	CE Class I	Ceiling mount	**MG**	1442010
Dimmable	No driver required			



HOMEFIELD PEDESTAL P.93

Exterior	Unswitched	Stainless steel	**TB**	1095036
12W Max LED E27/ES excl.	IP44	4.47kg		
Max lamp length 170mm	CE Class I	Pedestal mount		
Dimmable	No driver required			



INCLINE SINGLE P.101

Exterior	No driver required	LED lifetime 42,300 hrs	**CB**	1419002
Integral 8.2W LED	Brass	Supply frequency 50/60 Hz		
485LM 3000K 80CRI	1kg	Supply voltage 220-240V		
Not Dimmable	Wall mount	Driver lifetime 50,000 hrs		
Unswitched	2-step Macadam ellipse	Efficacy 59 lm/W		
IP65	Tilt adjustable angle 90°			
CE Class I	Rotation adjustable angle 330°			



INCLINE TWIN P.107

Exterior	No driver required	LED lifetime 42,300 hrs	**CB**	1419004
Integral 14.2W LED	Brass	Supply frequency 50/60 Hz		
1075LM 3000K 80CRI	1.8kg	Supply voltage 220-240V		
Dimmable - phase trailing edge	Wall mount	Driver lifetime 50,000 hrs		
Unswitched	2-step Macadam ellipse	Efficacy 76 lm/W		
IP65	Tilt adjustable angle 90°			
CE Class I	Rotation adjustable angle 330°			



JURA SINGLE SPOT P.107

Exterior	IP65	Wall mount downlight/uplight	**CB**	1375008
6W Max LED GU10 excl.	CE Class I	Tilt adjustable angle 100°		
Max lamp length 59mm	No driver required	Rotation adjustable angle 260°		
Dimmable	Brass	Trailing wire length 170mm		
Unswitched	2.3kg			



JURA SPIKE SPOT P.107

Exterior	IP65	Ground/Floor installation	**CB**	1375007
6W Max LED GU10 excl.	CE Class I	Tilt adjustable angle 100°		
Max lamp length 59mm	No driver required	Rotation adjustable angle 260°		
Dimmable	Brass	Trailing wire length 205mm		
Unswitched	1.8kg			



KAPPA P.23

Bathroom	CE Class II	LED lifetime 60,000 hrs	**MB**	1151004
Integral 3.4W LED	No driver required	Supply frequency 50/60 Hz		
98LM 3000K 90CRI	Zinc	Supply voltage 100-277V		
Not dimmable	0.73kg	Driver lifetime 30,000 hrs		
Unswitched	Wall mount - uplight/downlight	Mains 230V		
IP44	3-step Macadam ellipse	Efficacy 29 lm/W		



KURO 250 P.97

Exterior	IP44	Ground/Floor installation	**TB**	1430001
Integral 1.3W LED	CE Class III	5-step Macadam ellipse		
145LM 2700K 80CRI	No driver required	LED lifetime 54,000 hrs		
Dimmable: integral touch dimmer	Aluminium	Supply voltage 5V DC		
Switched	2.34kg	Efficacy 111 lm/W		



KURO 450 P.97

Exterior	IP44	Ground/Floor installation	**TB**	1430002
Integral 1.3W LED	CE Class III	5-step Macadam ellipse		
145LM 2700K 80CRI	No driver required	LED lifetime 54,000 hrs		
Dimmable: integral touch dimmer	Aluminium	Supply voltage 5V DC		
Switched	2.72kg	Efficacy 111 lm/W		



KYOTO LED P.25

Bathroom	Unswitched	Zinc	**MB**	1060013
Integral 7.9W LED	IP44	1kg	**PCh**	1060006
318LM 2700K 80CRI	CE Class II	Vertical wall mount		
Not dimmable	No driver required			



LAGO 280 P.33

Bathroom	Unswitched	Aluminium	**PCh**	1297001
12W Max LED E27/ES excl.	IP44	1.2kg	**MN**	1297002
Max lamp length 155mm	CE Class II	Vertical wall mount	**Br**	1297007
Dimmable	No driver required	Shade sold separatley		

H: 195 Ø: 113 **CONE 195** **NB** 5018046 **WF** 5018001 **WG** 5019001



LUCCA RECESSED P.53

Interior	No driver required	Supply frequency 50/60Hz	**MB**	1435009
Integral 3.6W LED	Zinc	Supply voltage 100-277V	**MN**	1435010
124LM 2700K 90CRI	0.93kg	Driver lifetime 30000 hrs	**MG**	1435011
Not Dimmable	Wall mount	Efficacy 34 lm/W	**Br**	1435012
Switched	3-step Macadam ellipse	Oval cut out: 44mm x 24mm		
IP20	Main light beam angle 31.8°	Recess depth: 65mm		
CE Class I	LED lifetime 60000 hrs	Plaster board installation only		



LUCCA RECESSED UNSWITCHED **MB** 1435013 **MN** 1435014 **MG** 1435015 **BR** 1435016
*special order only



LUCCA SURFACE P.53

Interior	CE Class I	Main light beam angle 31.8°	**MB**	1435001
Integral 3.6W LED	No driver required	LED lifetime 60000 hrs	**MN**	1435002
124LM 2700K 90CRI	Zinc	Supply frequency 50/60Hz	**MG**	1435003
Not Dimmable	0.95kg	Supply voltage 100-277V	**Br**	1435004
Switched	Wall mount	Driver lifetime 30000 hrs		
IP20	3-step Macadam ellipse	Efficacy 34 lm/W		



LUCCA SURFACE UNSWITCHED **MB** 1435005 **MN** 1435006 **MG** 1435007 **BR** 1435008
*special order only



MASCALI ROUND LED P.29

Bathroom	No driver required	LED lifetime 53,000 hrs	● **MB**	1373011
Integral 7.4W LED	Mild steel	Supply frequency 50/60 Hz		
110LM 2700K 90CRI	1.78kg	Supply voltage 100-240V		
Not dimmable	Horizontal wall mount	Driver lifetime 35,000 hrs		
Switched	Tilt adjustable angle 65°	Mains 230V		
IP44	Rotation adjustable angle 180°	Efficacy 15 lm/W		
CE Class II	2610-2710K Macadam ellipse			



MESSINA 200 P.89

Exterior	Unswitched	Stainless steel	● **TB**	1183028
12W Max LED E27/ES excl.	IP44	4.1kg		
Max lamp length 240mm	CE Class I	Vertical wall mount		
Dimmable	No driver required			



MESSINA TWIN P.89

Exterior	Unswitched	Stainless steel	● **TB**	1183027
2 X 12W Max LED E27/ES excl.	IP44	5.3kg		
Max lamp length 240mm	CE Class I	Vertical wall mount		
Dimmable	No driver required			



MILO 300 P.63

Interior	Unswitched	Ceramic	○ **GW**	1299009
12W Max LED E27/ES excl.	IP20	1.16kg		
Max lamp length 120mm	CE Class II	Horizontal wall mount		
Dimmable	No driver required			



MINIMA SLIMLINE 25 FIRE RATED P.63

Bathroom	No driver required	Ceiling installation	● **MB**	1249037
6W Max LED GU10 excl.	IP65	Round cut out: Ø86mm	○ **MW**	1249036
Max lamp length 73mm	CE Class II	Recess depth: 150mm		
Dimmable	Mild steel	Fire rated: 30 min, 60 min & 90 min EN1365-2		
Unswitched	0.35kg			



MINIMA SLIMLINE ROUND ADJUSTABLE FIRE RATED P.79

Indoor	IP20	Rotation adjustable angle 360°	● **MB**	1249041
6W Max LED GU10 excl.	CE Class II	Round cut out: Ø86mm	○ **MW**	1249040
Max lamp length 73mm	Mild steel	Recess depth: 150mm		
Dimmable	0.37kg	Fire rated: 30 min, 60 min & 90 min EN1365-2		
Unswitched	Ceiling installation			
No driver required	Tilt adjustable angle 30°			



MINIMA SLIMLINE ROUND FIXED FIRE RATED IP65 P.79

Bathroom	No driver required	Ceiling installation	● **MB**	1249035
6W Max LED GU10 excl.	IP65	Round cut out: Ø86mm	○ **MW**	1249034
Max lamp length 73mm	CE Class II	Recess depth: 150mm		
Dimmable	Mild steel	Fire rated: 30 min, 60 min & 90 min EN1365-2		
Unswitched	0.36kg			



MINIMA SLIMLINE SQUARE ADJUSTABLE FIRE RATED P.79

Indoor	IP20	Rotation adjustable angle 360°	● **MB**	1249043
6W Max LED GU10 excl.	CE Class II	Square cut out: 86mm x 86mm	○ **MW**	1249042
Max lamp length 73mm	Mild steel	Recess depth: 150mm		
Dimmable	0.39kg	Fire rated: 30 min, 60 min & 90 min EN1365-2		
Unswitched	Ceiling installation			
No driver required	Tilt adjustable angle 30°			



MINIMA SLIMLINE SQUARE FIXED FIRE RATED IP65 P.79

Bathroom	No driver required	Ceiling installation	● **MB**	1249039
6W Max LED GU10 excl.	IP65	Square cut out: 86mm x 86mm	○ **MW**	1249038
Max lamp length 73mm	CE Class II	Recess depth: 150mm		
Dimmable	Mild steel	Fire rated: 30 min, 60 min & 90 min EN1365-2		
Unswitched	0.38kg			



MITSU FLOOR P.65

Interior	IP20	Tilt adjustable angle 90°	○ **MN**	1394011
12W Max LED E27/ES excl.	CE Class II	Rotation adjustable angle 330°	● **Br**	1394012
Max lamp length 126mm	No driver required	Ground / floor mount		
Not dimmable	Mild steel	Trailing wire 3,000mm		
Switched	8kg			



MITSU TABLE P.65

Interior	IP20	Tilt adjustable angle 90°	○ **MN**	1394009
12W Max LED E27/ES excl.	CE Class II	Rotation adjustable angle 330°	● **Br**	1394010
Max lamp length 126mm	No driver required	Ground / floor mount		
Not dimmable	Mild steel	Trailing wire 2000mm		
Switched	4.7kg			



MITSU SWING ARM P.45

Interior	IP20	Tilt adjustable angle 90°	○ **MN**	1394001
12W Max LED E27/ES excl.	CE Class II	Rotation adjustable angle 330°	● **Br**	1394002
Max lamp length 126mm	No driver required	Horizontal wall mount		
Not dimmable	Mild steel			
Switched	1.5kg			



MITSU WALL P.45

Interior	IP20	Tilt adjustable angle 90°	○ **MN**	1394003
12W Max LED E27/ES excl.	CE Class II	Rotation adjustable angle 330°	● **Br**	1394004
Max lamp length 126mm	No driver required	Vertical wall mount		
Dimmable	Mild steel			
Switched	0.7kg			

H: 165 Ø: 173 **CONE 173 SHADE** / Polycotton **BF** 5018032 **MF** 5018045 **OF** 5018033 / silk **PF** 5018034 **WF** 5018031



MIURA DESK USB P.67

Interior	Mild steel		○ **MN**	1444007
Integral 7.5W LED	3.47kg	Supply voltage 220-240V	● **MG**	1444008
367LM 2700K 80CRI	3-step Macadam ellipse	Driver lifetime 30000 hrs		
Not Dimmable	Tilt adjustable angle 90°	Efficacy 49 lm/W		
Switched	Rotation adjustable angle 330°	Wire length 2000mm		
IP20	Beam angle 74.4°	Shade sold separately		
CE Class II	LED lifetime 42300 hrs	USB 2.1A 5V		
No driver required	Supply frequency 50/60Hz			



MIURA SWING ARM P.41

Interior	Zinc	Supply frequency 50/60Hz	● **MB**	1444004
Integral 7.5W LED	0.99kg	Supply voltage 220-240V	○ **MN**	1444005
367LM 2700K 80CRI	Vertical wall mount	Driver lifetime 30000 hrs	● **MG**	1444006
Not Dimmable	3-step Macadam ellipse	Efficacy 49 lm/W		
Switched	Tilt adjustable angle 90°	Shade sold separately		
IP20	Rotation adjustable angle 330°			
CE Class I	Beam angle 71.4°			
No driver required	LED lifetime 42300 hrs			



MIURA WALL P.41

Interior	No driver required	Lifetime 42300 hrs	● **MB**	1444001
Integral 7.5W LED	Zinc	Supply frequency 50/60Hz	● **MN**	1444002
367LM 2700K 80CRI	0.74kg	Supply voltage 220-240V	● **MG**	1444003
Not Dimmable	Vertical wall mount	Driver lifetime 30000 hrs		
Switched	3-step Macadam ellipse	Efficacy 49 lm/W		
IP20	Tilt adjustable angle 90°	Shade sold separately		
CE Class I	Rotation adjustable angle 330°			

H: 93 Ø: 105 **CONE 105 SHADE** / Mild Steel **MB** 5018052 **MN** 5018053 **MG** 5018054



MYOS P.103

Exterior	CE Class III	Tilt adjustable angle 180°	● **TB**	1426002
Integral 8W LED	Driver: constant current 700mA excl.	Main light beam angle 26.1°		
312LM 3000K 90CRI	Aluminium	LED lifetime 60500 hrs	Extension pole	
Dimmable: driver dependent	1.0kg	Efficacy 27 lm/W	● **TB**	6034001
Unswitched	Ground/Floor installation	Wire length 2700mm		
IP65	3-step Macadam ellipse			



PARALLEL P.61

Interior	Unswitched	Ceramic	○ **C**	1438001
12W Max LED E27/ES excl.	IP20	0.8kg		
Max lamp length 120mm	CE Class II	Horizontal wall mount		
Dimmable	No driver required			



PINHOLE SLIMLINE ROUND ADJUSTABLE FIRE RATED P.75

Indoor	IP20	Rotation adjustable angle 360°	○ **MW**	1434003
6W Max LED GU10 excl.	CE Class II	Round cut out: Ø83mm		
Max lamp length 73mm	Mild steel	Recess depth: 150mm		
Dimmable	0.4kg	Fire rated: 30 min, 60 min & 90 min EN1365-2		
Unswitched	Ceiling installation			
No driver required	Tilt adjustable angle 25°			



PINHOLE SLIMLINE ROUND FIXED FIRE RATED IP65 P.75

Bathroom	No driver required	Ceiling installation	○ **MW**	1434001
6W Max LED GU10 excl.	IP65	Round cut out: Ø70mm		
Max lamp length 73mm	CE Class II	Recess depth: 150mm		
Dimmable	Mild steel	Fire rated: 30 min, 60 min & 90 min EN1365-2		
Unswitched	0.39kg			



PINHOLE SLIMLINE ROUND FLUSH ADJUSTABLE FIRE RATED P.75

Indoor	IP20	Rotation adjustable angle 360°	○ **MW**	4134008
6W Max LED GU10 excl.	CE Class II	Round cut out: Ø79mm		
Max lamp length 73mm	Mild steel	Recess depth: 150mm		
Dimmable	0.4kg	Fire rated: 30 min, 60 min & 90 min EN1365-2		
Unswitched	Ceiling installation - existing ceiling			
No driver required	Tilt adjustable angle 25°			



PINHOLE SLIMLINE ROUND FLUSH FIXED FIRE RATED IP65 P.75

Bathroom	No driver required	Ceiling installation - new ceiling	○ **MW**	1434007
6W Max LED GU10 excl.	IP65	Round cut out: Ø62mm		
Max lamp length 73mm	CE Class II	Recess depth: 150mm		
Dimmable	Mild steel	Fire rated: 30 min, 60 min & 90 min EN1365-2		
Unswitched	0.39kg			



PINHOLE SLIMLINE SQUARE ADJUSTABLE FIRE RATED P.75

Indoor	IP20	Rotation adjustable angle 360°	○ **MW**	1434004
6W Max LED GU10 excl.	CE Class II	Round cut out: Ø83mm		
Max lamp length 73mm	Mild steel	Recess depth: 150mm		
Dimmable	0.42kg	Fire rated: 30 min, 60 min & 90 min EN1365-2		
Unswitched	Ceiling installation			
No driver required	Tilt adjustable angle 25°			



PINHOLE SLIMLINE SQUARE FIXED FIRE RATED IP65 P.75

Bathroom	No driver required	Ceiling installation	○ **MW**	1434002
6W Max LED GU10 excl.	IP65	Round cut out: Ø70mm		
Max lamp length 73mm	CE Class II	Recess depth: 150mm		
Dimmable	Mild steel	Fire rated: 30 min, 60 min & 90 min EN1365-2		
Unswitched	0.39kg			



PINHOLE SQUARE TRIPLE ADJUSTABLE P.75

Indoor	IP20	Rotation adjustable angle 360°	○ **MW**	1434006
3 X 6W Max LED GU10 excl.	CE Class II	Round cut out: Ø83mm x 3		
Max lamp length 73mm	Mild steel	Recess depth: 150mm		
Dimmable	1.04kg	Fire rated: 30 min, 60 min & 90 min EN1365-2		
Unswitched	Ceiling installation			
No driver required	Tilt adjustable angle 25°			



PINHOLE SQUARE TWIN ADJUSTABLE P.75

Indoor	IP20	Rotation adjustable angle 360°	○ **MW**	1434005
2 X 6W Max LED GU10 excl.	CE Class II	Round cut out: Ø83mm x 2		
Max lamp length 73mm	Mild steel	Recess depth: 150mm		
Dimmable	0.75kg	Fire rated: 30 min, 60 min & 90 min EN1365-2		
Unswitched	Ceiling installation			
No driver required				



SAGARA P.27

Bathroom	Unswitched	Zinc	● **MB**	1168003
3W Max LED G9 excl.	IP44	0.9kg		
Max lamp length 55mm	CE Class II	Vertical wall mount		
Dimmable	No driver required			



SIDE BY SIDE GRANDE USB P.43

Interior	Switched	Horizontal/vertical wall mount	● **Br**	1406012
12W Max LED E27/ES excl.	IP20	Tilt adjustable angle 90°	● **MB**	1406013
+ integral 3.6W LED	CE Class I	Rotation adjustable angle 330°	● **MN**	1406014
134LM 2700K 90CRI	No driver required	Secondary lamp beam angle 17°		
Max lamp length 118mm	Zinc	Shade sold separately		
Not dimmable	1.87kg			

H: 160 Ø: 250 **TAPERED ROUND 250 SHADE** / Polycotton **BF** 5035004 **MF** 5035023 **PF** 5035005 **WF** 5035003



TACOMA SINGLE P.17

Bathroom	Unswitched	Zinc	● **PCh**	1429001
3W Max LED G9 excl.	IP44	0.95kg	● **MB**	1429004
Max lamp length 60mm	CE Class I	Vertical wall mount	● **AB**	1429007
Dimmable	No driver required			



TACOMA SINGLE GRANDE P.17

Bathroom	Unswitched	Zinc	PCh	1429003
3W Max LED G9 excl.	IP44	0.96kg	MB	1429006
Max lamp length 60mm	CE Class I	Vertical wall mount	AB	1429009
Dimmable	No driver required			



TACOMA TWIN P.17

Bathroom	Unswitched	Mild steel	PCh	1429002
2 X 3W Max LED G9 excl.	IP44	0.94kg	MB	1429005
Max lamp length 60mm	CE Class I	Vertical wall mount	AB	1429008
Dimmable	No driver required			

H: 130 Ø: 135

TACOMA SHADES / Glass **Plain / opal** 5036001 **Ribbed / clear** 5036003 **Ribbed / opal** 5036004 **Ribbed / smoked** 5036005



TRIMLESS ROUND ADJUSTABLE P.77

Indooor	No driver required	Ceiling installation - new ceiling	MW	1248024
6W Max LED GU10 excl.	IP20	Tilt adjustable angle 30°		
Max lamp length 73mm	CE Class II	Rotation adjustable angle 360°		
Dimmable	Mild steel	Round cut out: Ø79mm		
Unswitched	0.39kg	Recess depth: 150mm		



TRIMLESS ROUND FIXED P.77

Bathroom	No driver required	Ceiling installation - new ceiling	MW	1248023
6W Max LED GU10 excl.	IP20	Square cut out: Ø79mm		
Max lamp length 73mm	CE Class II	Recess depth: 150mm		
Dimmable	Mild steel			
Unswitched	0.39kg			



TRIMLESS ROUND TWIN ADJUSTABLE P.77

Indoor	IP20	Rotation adjustable angle 360°	MW	1248021
2 X 6W Max LED GU10 excl.	CE Class II	Slot cut out: W159 x Ø79mm		
Max lamp length 73mm	Mild steel	Recess depth: 150mm		
Dimmable	0.71kg	Fire rated: 30 min, 60 min & 90 min EN1365-2		
Unswitched	Ceiling installation - new ceiling			
No driver required	Tilt adjustable angle 30°			



TRIMLESS SLIMLINE ROUND ADJUSTABLE FIRE RATED P.77

Indoor	IP20	Rotation adjustable angle 360°	MW	1248019
6W Max LED GU10 excl.	CE Class II	Round cut out: Ø79mm		
Max lamp length 73mm	Mild steel	Recess depth: 150mm		
Dimmable	0.39kg	Fire rated: 30 min, 60 min & 90 min EN1365-2		
Unswitched	Ceiling installation - new ceiling			
No driver required	Tilt adjustable angle 30°			



TRIMLESS SLIMLINE ROUND FIXED FIRE RATED IP65 P.77

Bathroom	No driver required	Ceiling installation - new ceiling	MW	1248017
6W Max LED GU10 excl.	IP65	Round cut out: Ø79mm		
Max lamp length 73mm	CE Class II	Recess depth: 150mm		
Dimmable	Mild steel	Fire rated: 30 min, 60 min & 90 min EN1365-2		
Unswitched	0.39kg			



TRIMLESS SQUARE ADJUSTABLE P.77

Indooor	No driver required	Ceiling installation - new ceiling	MW	1248020
6W Max LED GU10 excl.	IP20	Tilt adjustable angle 30°		
Max lamp length 73mm	CE Class II	Rotation adjustable angle 360°		
Dimmable	Mild steel	Square cut out: 79mm x 79mm		
Unswitched	0.41kg	Recess depth: 150mm		



TRIMLESS SQUARE FIXED P.77

Bathroom	No driver required	Ceiling installation - new ceiling	MW	1248018
6W Max LED GU10 excl.	IP20	Square cut out: 79mm x 79mm		
Max lamp length 73mm	CE Class II	Recess depth: 150mm		
Dimmable	Mild steel			
Unswitched	0.43kg			



TRIMLESS SQUARE TWIN ADJUSTABLE P.77

Indooor	No driver required	Ceiling installation - new ceiling	MW	1248022
2 X 6W Max LED GU10 excl.	IP20	Tilt adjustable angle 30°		
Max lamp length 73mm	CE Class II	Rotation adjustable angle 360°		
Dimmable	Mild steel	Square cut out: 162mm x 79mm		
Unswitched	0.71kg	Recess depth: 150mm		



VERSAILLES 250 PHASE DIMMABLE P.77

Interior	CE Class II	LED lifetime 54000 hrs	PCh	1380024
Integral 4.5W LED	No driver required	Supply frequency 50/60Hz	Br	1380025
320LM 3000K 80CRI	Mild Steel	Supply voltage 220-240V	MG	1380026
Dimmable: phase leading+trailing	2.48kg	Driver lifetime 50000 hrs		
Unswitched	Vertical wall mount	Efficacy 71 lm/W		
IP44 Zone 2, 3	3-step Macadam ellipse			



VERSAILLES 400 PHASE DIMMABLE P.77

Interior	CE Class II	LED lifetime 54000 hrs	PCh	1380029
Integral 7.1W LED	No driver required	Supply frequency 50/60Hz	Br	1380030
658LM 3000K 80CRI	Mild Steel	Supply voltage 220-240V	MG	1380031
Dimmable: phase trailing edge	3.2kg	Driver lifetime 50000 hrs		
Unswitched	Vertical wall mount	Efficacy 93 lm/W		
IP44 Zone 2, 3	3-step Macadam ellipse			



ZEPPO READER P.49

Interior	CE Class I	Secondary lamp beam angle 17°	MW	1176008
3W Max LED G9 excl. + integral 4.1W LED	No driver required	LED lifetime 60000 hrs	MB	1176009
149LM 2700K 90CRI	Aluminium	Supply frequency 50/60Hz	MN	1176010
Max lamp length 55mm	1.92kg	Supply voltage 100-277V		
Not Dimmable	Horizontal/vertical wall mount	Driver lifetime 30000 hrs		
Switched	Rotation adjustable angle 330°	Efficacy 36 lm/W		
IP20	3-step Macadam ellipse			

SHADES

STANDARD COLOURS We supply a range of standard shade options to complement our designs. You'll find full details of compatible shades on each of the product pages.

WF*
White fabric
Tissu blanc
Weißer Stoff
Tessuto bianco

WP*
White Pleated
Blanc plissé
weiß plissiert
Bianco pieghettato

BF*
Black fabric
Tissu noir
Schwarzer Stoff
Tessuto nero

OF*
Oyster fabric
Tissu oyster
Oyster Stoff
Tessuto madreperla

PF*
Putty fabric
Tissu putty
Putty Stoff
Tessuto grigio stucco

MF*
Mocha fabric
Tissu moka
Mokka Stoff
Tessuto moca

SPECIAL ORDERS All Astro shades are available in a variety of additional colours and can be ordered on a special basis with a minimum order quantity of 30 pieces.

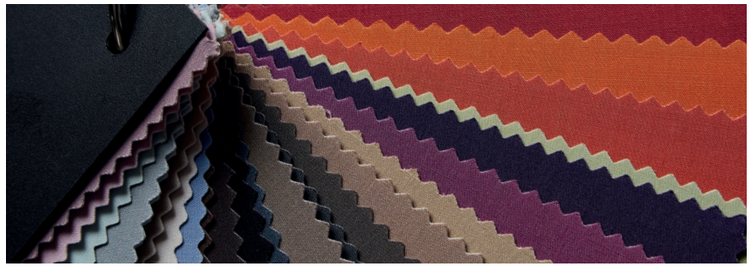

IT Finiture paralume standard: Forniamo una serie di paralumi standard adatti per tutti i progetti. Troverete dettagli sui paralumi compatibili su ognuna delle pagine prodotto. Opzioni colori speciali: Tutti i paralumi Astro sono disponibili in una serie di colori aggiuntivi e possono essere richiesti tramite ordine speciale in numero minimo di 30 pezzi.

FR Finitions des abat-jours standard: Nous proposons une gamme d'abat-jours standard qui complètent nos modèles. Vous trouverez toutes les informations sur les abat-jours compatibles dans les pages consacrées à chacun de nos produits. Choix de couleurs spéciales: Tous les abat-jours Astro sont disponibles dans une variété de couleurs supplémentaires. Ils peuvent être commandées spécialement en quantité minimale de 30 unités.

DE Standardausführungen: Wir liefern ein breites Spektrum von Standardschirmen zur Ergänzung unserer Designs. Vollständige Einzelheiten zu kompatiblen Schirmen finden sie auf den jeweiligen Produktseiten. Besondere Farboptionen: Alle Astro-Lampenschirme sind in einer Vielzahl zusätzlicher Farben erhältlich und können auf besonderer Basis mit einer Mindestabnahmemenge von 30 Stück bestellt werden.

* Please note colours may vary from batch to batch / Merci de noter que les colours peuvent varier d'un lot a l'autre / Bitte beachten: Farben können je nach Charge variieren / I colori potrebbero essere diversi a seconda del lotto di produzione.

SPECIAL ORDERS

In addition to our extensive product portfolio which can be found at astrolighting.com, we also provide exclusive specification options. Special order luminaries, which offer you flexibility in finish, size or specification, have a minimum order quantity of 100 pieces and an extended lead time, although we will always work hard to meet your project deadline.



IT Oltre alla nostra vasta gamma di prodotti, reperibile su astrolighting.com, forniamo anche componenti opzionali in base a specifiche di progetto esclusive. Apparecchi di illuminazione richiesti con ordine speciale che offrono flessibilità di finitura, dimensioni o specifiche, prevedono una quantità di ordinazione minima di 100 pezzi e una data di consegna estesa, anche se faremo sempre il massimo per rispettare la data di consegna stabilita per il progetto.

FR En plus de notre vaste gamme de produits, que vous pouvez découvrir sur astrolighting.com, nous proposons des options exclusives. Elles incluent des luminaires disponibles sur commande spéciale, autorisant plus de flexibilité dans le choix des finitions, des tailles ou des spécifications, une quantité minimale de 100 unités et un délai de livraison plus souple, mais nous faisons toujours le maximum pour respecter les délais de votre projet.

DE Zusätzlich zu unserem umfassenden Produktportfolio, das Sie auf astrolighting.com finden, bieten wir außerdem exklusive Spezifikationsoptionen an. Sonderbestellungen von Leuchten mit flexibel auswählbaren Ausführungen, Größen oder Spezifikationen sind ab einer Mindestbestellmenge von 100 Stück möglich und erfordern längere Lieferzeiten, wobei wir jedoch stets größte Anstrengungen unternehmen werden, Ihre Projektfristen einzuhalten.

CASAMBI

IT Gli apparecchi di illuminazione Astro sono compatibili con la maggior parte dei sistemi di illuminazione Smart Home come Philips Hue. Per una soluzione di controllo professionale, collaboriamo con Casambi per offrire un sistema di illuminazione intelligente wireless multifunzione facile da integrare e configurare. Attraverso i suoi interruttori e sensori wireless, Casambi fornisce un sistema di controllo dell'illuminazione veramente intelligente. Vedi astrolighting.com/Casambi per maggiori informazioni.

FR Les luminaires Astro à ampoules sont compatibles avec la plupart des systèmes d'éclairage Smart Home, tels que Philips Hue. Pour notre solution de contrôle professionnelle, nous nous sommes associés à Casambi qui nous permet d'intégrer un système d'éclairage intelligent sans fil complet, facile à intégrer et à configurer. Grâce à des interrupteurs et des capteurs sans fil, Casambi fournit un contrôle de l'éclairage véritablement intelligent. Consultez astrolighting.com/Casambi pour en savoir plus.

DE Astro-Leuchten sind mit den meisten intelligenten Beleuchtungssystemen wie etwa Philips Hue kompatibel. Für eine professionelle Steuerungslösung arbeiten wir mit unserem Partner Casambi zusammen, um ein funktionsreiches, drahtloses intelligentes Beleuchtungssystem anzubieten, das problemlos integrier- und konfigurierbar ist. Durch zusätzliche Funkschalter und -sensoren ermöglicht Casambi eine wahrhaft intelligente Beleuchtungssteuerung. Mehr hierzu erfahren Sie auf astrolighting.com/Casambi.

Astro lamped luminaires are compatible with most Smart Home lighting systems such as Philips Hue. For a professional control solution, we have partnered with Casambi to offer a fully featured wireless smart lighting system that is easy to integrate and configure. With the addition of wireless switches and sensors, Casambi provides truly intelligent lighting control. See astrolighting.com/Casambi to learn more.



FINISHES

AB
antique brass
lation antique
messing antik
ottone antico

Br
bronze
bronze
bronze
bronzo

BSS
brushed stainless steel
acier inoxydable brossé
rostfreier edelstahl
gebürst, acciaio inox
spazzolato

C
ceramic
céramique
keramisch
ceramica

CB
coastal brass
lation coastal
messing coastal
ottone coastal

FR
frosted glass
verre satiné
satiniertes glas
smerigliato

GW
gloss white
blanc brillant
glanz weiß
bianco lucido

MB
matt black
noir mat
matt schwarz
nero opaco

MG
matt gold
or mat
matt gold
oro opaco

MN
matt nickel
nickel mat
nickel matt
nickel opaco

MW
matt white
blanc mat
matt weiß
bianco opaco

NB
natural brass
laiton naturel
messing natur
ottone naturale

PCh
polished chrome
chrome poli
chrom poliert
cromo brillante

P
plaster
plâtre
gips
gesso

TB
textured black
noir texturé
texture schwarz
nero tessurizzato

TW
textured black
blanc texturé
texture weiß
bianco tessurizzato

SYMBOLS

GLASS COMPONENT
verre / glas / componente in vetro

DIMMABLE
dimmable / dimmbar / dimmerabile

MAGNIFICATION
grossissement / vergrößerung / ingrandimento

FIRE-RATED
Résistant au feu / schwer entflammbar / ignifugo

SWITCHED with on/off switch or pull cord
avec interrupteur / mit An-/Ausschalter oder Zugschalter / con interruttore on/off o a tirante

PHOTOMETRIC DATA
Please refer to the Astro website: astrolighting.com for photometric data on this product. Merci de consulter le site internet d'Astro pour les données photométriques de cet article.astrolighting.com / Die lichttechnischen Daten für dieses Produkt finden Sie auf unserer Webseite astrolighting.com / Idati fotometrici di questo prodoto si possono trovare sul sito web: astrolighting.com

CASAMBI
Products are compatible when combined with Casambi Accessories (see website for details). I prodotti sono compatibili se combinati con gli accessori Casambi (visita il sito web per dettagli) / Les produits sont compatibles lorsqu'ils sont combinés avec les accessoires Casambi (voir le site Web pour plus de détails) / Produkte sind in Kombination mit Casambi-Zubehör kompatibel (Einzelheiten finden Sie auf der Website)

ASTRO GLOBAL LOCATIONS + DISTRIBUTORS

UNITED KINGDOM

The Astro Building
Unit 2, River Way
Harlow CM20 2GJ

hello-uk@astrolighting.com
astrolighting.com

ITALY

hello-it@astrolighting.com
astrolighting.com

NORTH AMERICA

hello-us@astrolighting.com
us.astrolighting.com

SINGAPORE

hello-sg@astrolighting.com
astrolighting.com

CHINA

hello-ch@astrolighting.com
astrolighting.com

MIDDLE EAST & AFRICA

hello-mea@astrolighting.com
astrolighting.com

GENERAL ENQUIRIES

customerservice@astrolighting.com
astrolighting.com

To find all our global distributors please visit our website / Um unsere internationalen Fachhändler zu finden, besuchen Sie bitte unsere Website / Pour trouver tous nos revendeurs internationaux, veuillez consulter notre site web / Per localizzare tutti i nostri partner internazionali visita il nostro sito web: *astrolighting.com/distributors*



AUSTRALIA

ENLIGHTENED LIVING (SHOWROOM)
sydney@enlightened-living.com.au
www.enlightened-living.com.au

AUSTRIA

ILLUMINA LEUCHTEN GMBH
info@illumina.de
www.illumina.de

BELGIUM

BRULIGHT
info@brulight.eu
www.brulight.eu

CHINA

ART LIGHTING
art_light@126.com

CZECH REPUBLIC

LONDON LIGHT S.R.O
info@londonlight.cz
www.londonlight.cz

DENMARK

ALL-LIGHT A/S
info@all-light.dk
www.all-light.dk

ESTONIA

AS MOODNE VALGUSTUS
moodne@valgustus.ee
www.valgustus.ee

FINLAND

TECLUX OY
teclux@teclux.fi
www.teclux.fi

FRANCE

RÊ MAJEUR SAS
contact@re-majeur.com
www.re-majeur.com

GERMANY

ILLUMINA LEUCHTEN GMBH
info@illumina.de
www.illumina.de

HONG KONG

FUTURE LIGHTING (SHOWROOM)
sales@flcl.com.hk
www.futurelighting.com.hk

INDIA

ARCHITECTURAL LIGHTING CONCEPTS
info@alclighting.com
www.alclighting.com

DEBBAS LIGHTING INDIA PVT LTD
info@debbasprime.in
www.debbas.com

DEFA LIGHTING SOLUTIONS PVT LTD
www.defasolutions.net
www.thedefa.com

THEA LIGHTWORKS
info@th-ea.com
www.loveoflight.in

GOJIS
web@gojis.in
www.gojis.in

INDONESIA

CLA ASIA PT CREATIVE LIGHTING ASIA
indonesia@cla.asia
www.cla.asia

LAFLO
ask@laflo.co.id
www.laflo.co.id

JAPAN

OLYMPIA
sale@olympia-jp.co.jp
www.olympia-jp.co.jp

LUXEMBOURG

BRULIGHT
info@brulight.eu
www.brulight.eu

MALAYSIA

ARI LIGHTING
info@arilighting.my
www.arilighting.my

ILUMEN
info@ilumen.my
www.ilumen.my

MAURITIUS

CLARDY LTD
admin@clardy.mu
www.clardy.mu

MEXICO

DIEZ COMPANY
ask@diezcompany.mx
www.diezcompany.mx

MOROCCO

CNI MOROCCO
welcome@lights.cni-sa.com
www.lights.cni-sa.co

NETHERLANDS

ILU DESIGN B.V.
info@iludesign.com
www.iludesign.com

NORWAY

TRIOLUX AS
post@triolux.no
www.triolux.no

NEW ZEALAND

ECC NZ (SHOWROOM)
info@ecc.co.nz
www.ecc.co.nz

PHILLIPINES

GREEN GROUP (SHOWROOM)
info@greengroupinc-asia.com
www.greengroupinc-asia.com

STELTZ INTERNATIONAL INC.
www.steltzinternational.com

POLAND

AURORA TECHNIKA ŚWIETLNA
aurorats@aurorats.pl
www.aurorats.pl

PORTUGAL

ASTRATEC
mail@astratec.pt
www.astratec.pt

QATAR

ABENSAL
qatar@abensal.com
www.abensal.com

RUSSIA

GBM
info@gbm-light.ru
www.gbm-light.ru

SINGAPORE

GENESIS LIGHTING (SHOWROOM)
enquiry@genesislightingco.com
www.genesislightingco.com

KOIZUMI
sales@koizumi.sg
www.koizumi.sg

LIGHTIMAGE
info@lightimage.sn
www.lightimage.sn

LIM KIM HAI
customerservice@limkimhai.com.sg
www.limkimhai.com.sg

LUXLIGHT
info@luxlight.sg
www.luxlight.sg

MADE & MAKE (SHOWROOM)
info@madeandmake.sg
www.madeandmake.sg

MILLION LIGHTING
enquiry@millionlighting.com
www.millionlighting.com

PALICON LIGHTING
sales@palicon.asia
www.palicon.asia

SLOVAKIA

LONDON LIGHT S.R.O
info@londonlight.cz
www.londonlight.cz

SOUTH KOREA

SAMJIN
theedit@theedit.co.kr
www.theedit.co.kr

D LIGHT
info@dlight.sk
www.ilumen.sk

OPUS INTL
info@opus-intl.com
www.opus-intl.com

SPAIN

FORUM INTERNACIONAL
info@foruminternacional.es
www.foruminternacional.es

SRI LANKA

MY LAN MARKETING
info@mylanmarketing.sk
www.mylanmarketing.sk

PHOTONICS LIGHTING PVT. LTD.
Sales@photonics.lk
www.www.photonics.lk

SWEDEN

SANOVA AB
info@sanova.se
www.sanova.se

SWITZERLAND

3L SUISSE SA
info@3-l.ch
www.3-l.ch

TAIWAN

CITYLITE
citylite@ms10.hinet.net
www.citylite.com.tw

THAILAND

LIGHTING HOUSE
lightonthelion@gmail.com
www.lightinghouse.co.th

PALICON
info@palicon.co.th
www.palicon.asia

UKRAINE

P.E. ELEKOMP
elekomp@ukr.net
www.elekomp.com.ua

UNITED ARAB EMIRATES

ABENSAL LIGHTING
info@abensal.com
www.abensal.com

VIETNAM

LONG KHANG
info@lk-tech.com
www.lk-tech.com

NEWLIGHT (SHOWROOM)
info@newlightvn.com
www.newlightvn.com

DESIGN RIGHTS

The majority of products shown in this catalogue have been designed by Astro Lighting Limited, which retains the ownership of all design rights in these Astro-designed products. Astro Lighting has a policy of constant product improvement, and whilst every care has been taken in the production of this catalogue, products supplied may differ in detail from the illustrations, images and descriptions given and therefore these descriptions and illustrations shall not form part of any contract. Details of alterations will be provided on request. Astro Lighting only use LEDs from the leading manufacturers. Nevertheless, colour temperatures can vary between batches and between manufacturers.

IT La maggior parte dei prodotti illustrati nel presente catalogo è stata ideata da Astro Lighting Limited, che detiene tutti i diritti di progettazione di tali prodotti Astro. Astro Lighting ha adottato da sempre una una politica di costante sviluppo del prodotto ed ha elaborato questo catalogo con estrema cura ed attenzione. Prodotti forniti possono essere diversi nei dettagli dalle illustrazioni, le immagini e le descrizioni riportate e quindi queste descrizioni e le illustrazioni non fanno parte di alcun contratto I dettagli delle modifiche verranno forniti su richiesta. Astro Lighting utilizza solamente LED di primaria qualità. La temperatura di colore del LED potrebbe essere diversa a seconda dei lotti e dei produttori.

FR La majorités des produits présents dans ce catalogue ont été créés par Astro Lighting Ltd qui en détient tous les droits. Astro Lighting mène une politique d'amélioration constante de ses produits. De ce fait et, bien que le plus grand soin ait été apporté à la réalisation de ce catalogue, les produits fournis peuvent différer dans le détail des illustrations, des images et des descriptions fournies et, par conséquent ces descriptions et illustrations ne font pas partie de tout contrat. La description des éventuelles modifications peut être obtenue sur simple demande. Astro Lighting utilise exclusivement des LEDs de fabricants reconnus. Néanmoins les températures de couleur peuvent varier d'un fabricant à l'autre et d'un lot à l'autre.

DE Die Mehrheit der im Katalog gezeigten Produkten wurden von Astro Lighting Limited entworfen. Astro Lighting Limited behält sich alle Entwurfsrechte Ihrer entworfenen Produkten vor. Astro Lighting Limited betreibt eine Politik der konstanten Produktverbesserung. Trotz größter Sorgfalt bei der Erstellung dieses Kataloges könnten. Die gelieferten Produkte können im Detail von den Abbildungen , Bilder und Beschreibungen gegeben und damit diesen Beschreibungen und Darstellungen abweichen sind nicht Teil eines Vertrages. Details von etwaigen Änderungen werden gern auf Anfrage bereitgestellt. Astro Lighting verwendet ausschließlich LEDs führender Hersteller. Dennoch kann die Farbtemparatur je nach Hersteller und Charge leicht variieren.

Follow @astrolighting