Seltex
wallcoverings

PVC-Free Wallcoverings

Evolve
PVC-Free Contract Wallcovering



In an era marked by heightened environmental awareness, Seltex Evolve PVC-free contract wallcoverings are setting a new standard in sustainable interior design. These innovative wallcoverings not only elevate the aesthetics of interior spaces but also prioritise environmental responsibility by being entirely free of PVC (polyvinyl chloride). Let's explore what makes Seltex Evolve a pioneering choice for the environmentally conscious.



Sustainable Material Choices


Seltex Evolve is crafted using alternative materials that are not only eco-friendly but also high-performance. These materials are carefully selected to ensure the wallcoverings meet the stringent standards of the contract design industry. This combination of sustainability and performance is a testament to Seltex's dedication to delivering quality products that do not compromise on aesthetics or durability.

Versatile Design Options

Seltex Evolve PVC-free contract wallcoverings offer a diverse range of design options to cater to various tastes and interior spaces. Whether you're aiming for a classic, elegant look or a contemporary, vibrant atmosphere, Seltex Evolve has a wide array of patterns, colours, and textures to choose from. This versatility allows designers and architects to achieve their creative vision while making a sustainable choice.

Exceptional Durability


Contract wallcoverings are subjected to rigorous wear and tear in commercial spaces, making durability a top priority. Seltex Evolve excels in this regard, providing robust protection for walls against stains, abrasion, and fading. Its long-lasting performance ensures that your investment stands the test of time, reducing the need for frequent replacements.

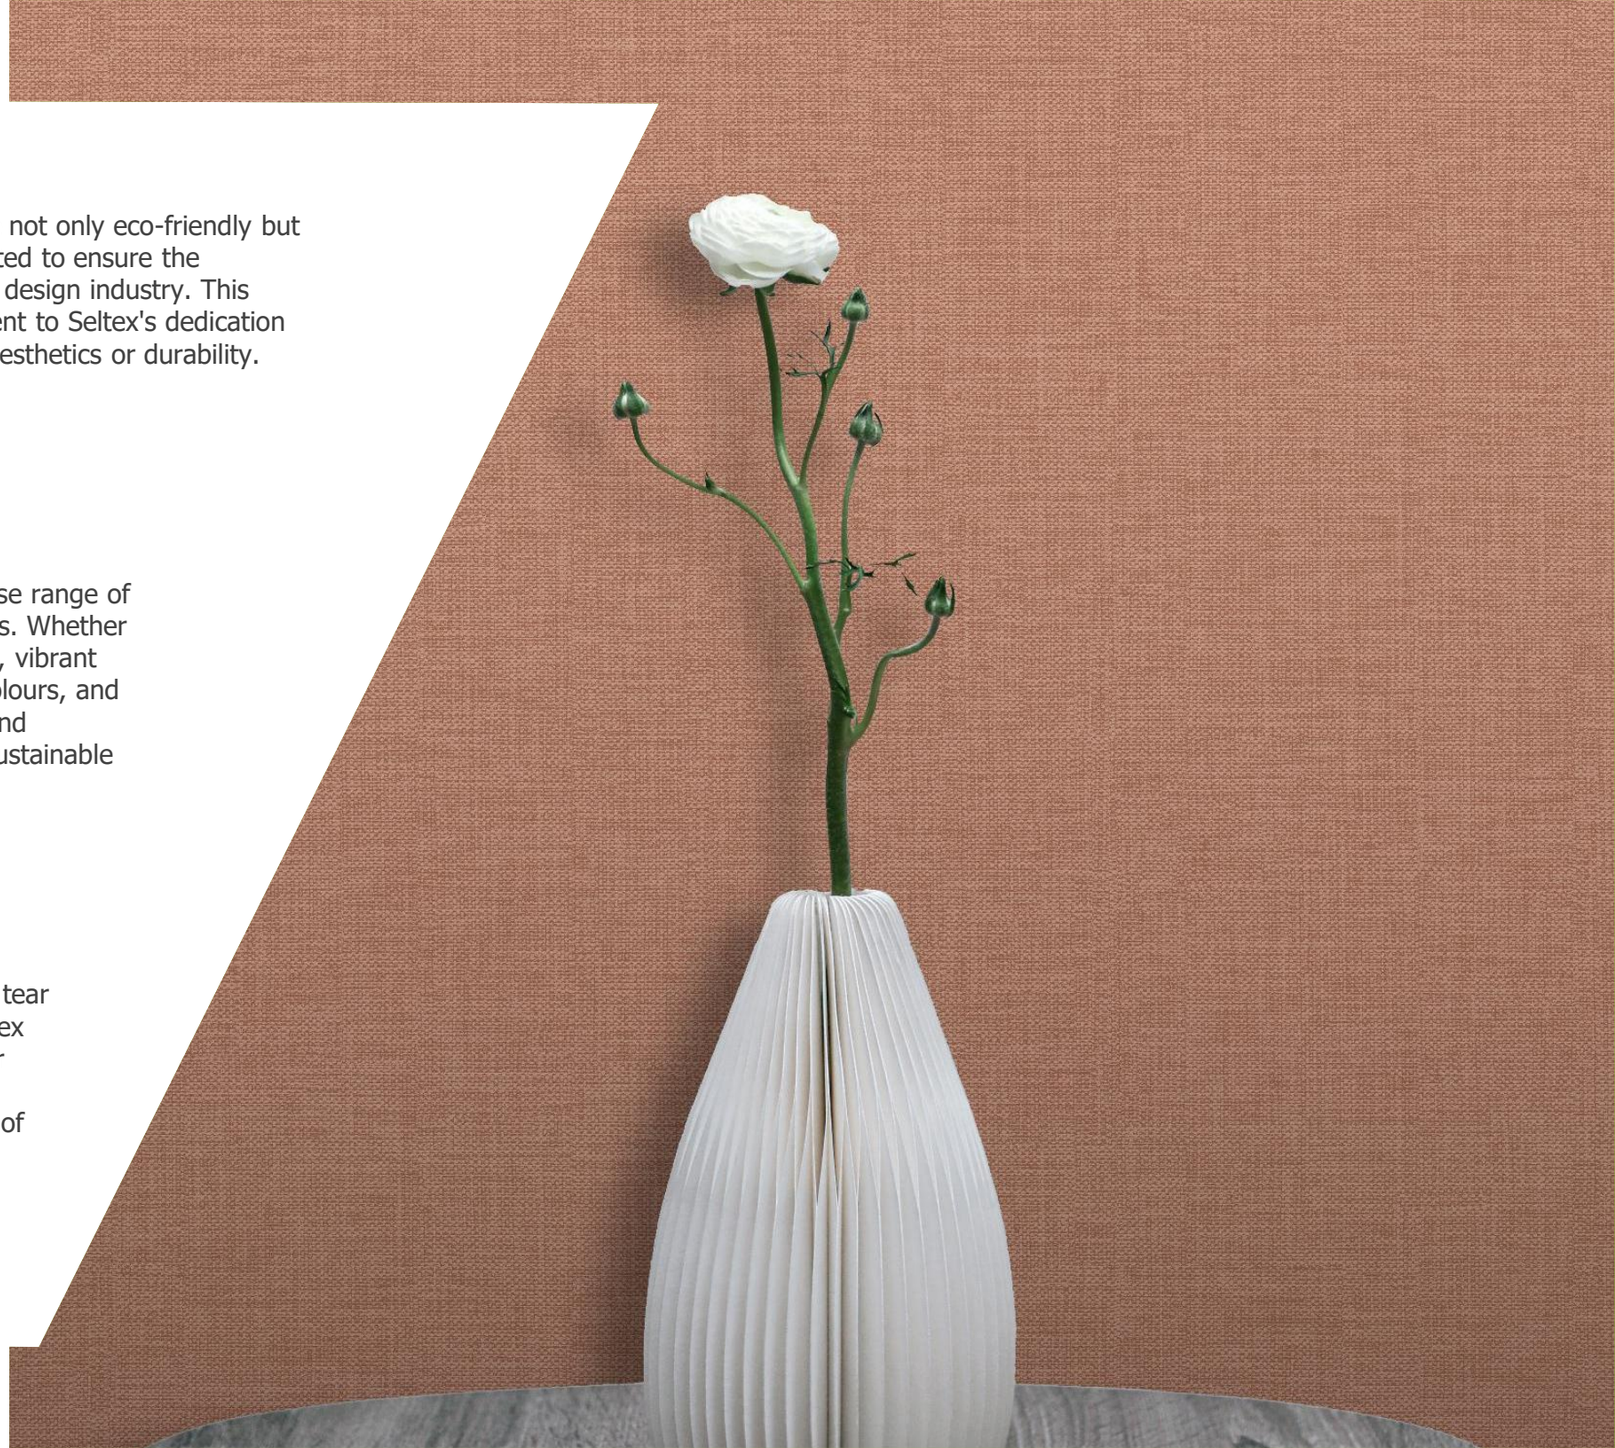


Seltex
wallcoverings

Lugano

View online

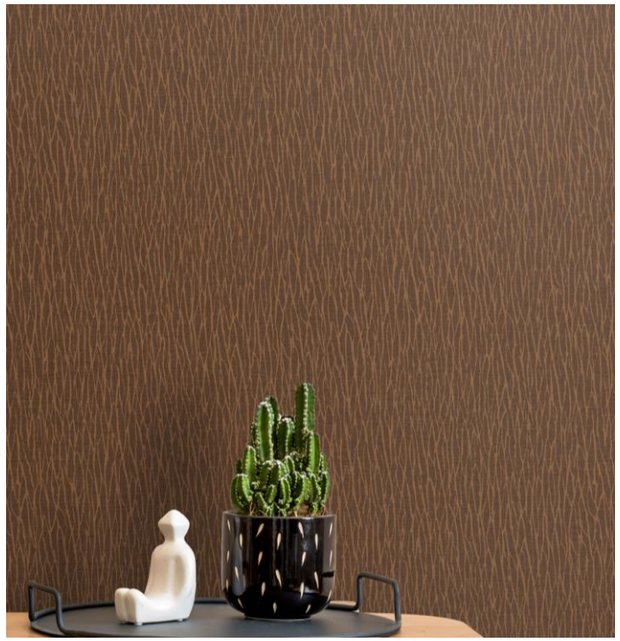


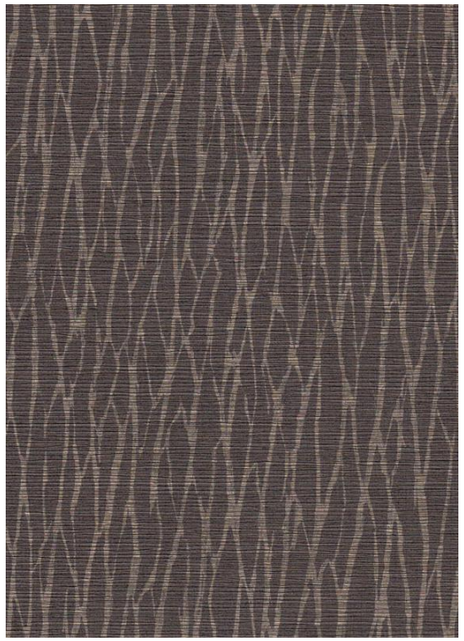

Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / Random Match
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84



EVO288-067




EVO288-117



EVO288-286




EVO288-307



EVO288-342



EVO288-406



EVO319-628



EVO319-816



EVO319-944



EVO319-998


T: +44(0)20 8211 3107 E: sales@seltex.co.uk W: seltex.co.uk

©Seltex Wallcoverings

Seltex
wallcoverings

Shanghai

View online

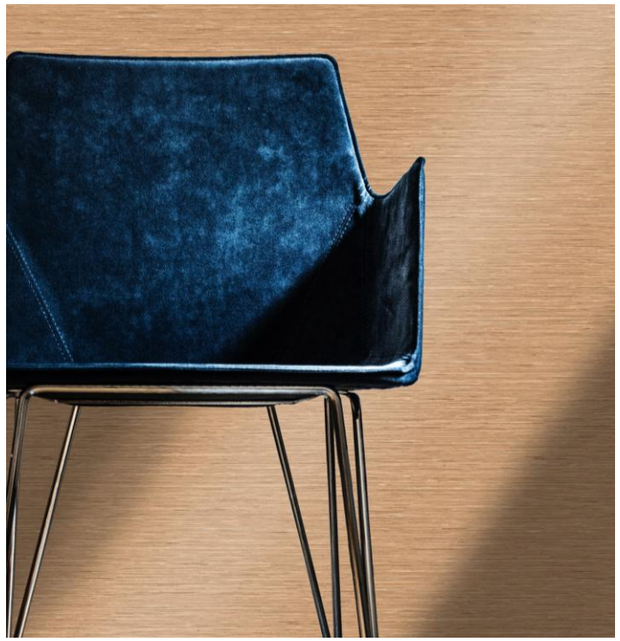



Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / Random Match
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84


EVO312-117


EVO312-169


EVO312-197


EVO312-238


EVO312-279


EVO312-342


EVO312-375


EVO312-383


EVO312-399


EVO312-462


EVO312-589


EVO312-592


EVO312-653


EVO312-705


EVO312-793


EVO312-820


EVO312-884


T: +44(0)20 8211 3107 E: sales@seltex.co.uk W: seltex.co.uk

©Seltex Wallcoverings

Seltex
wallcoverings

Vevey

View online

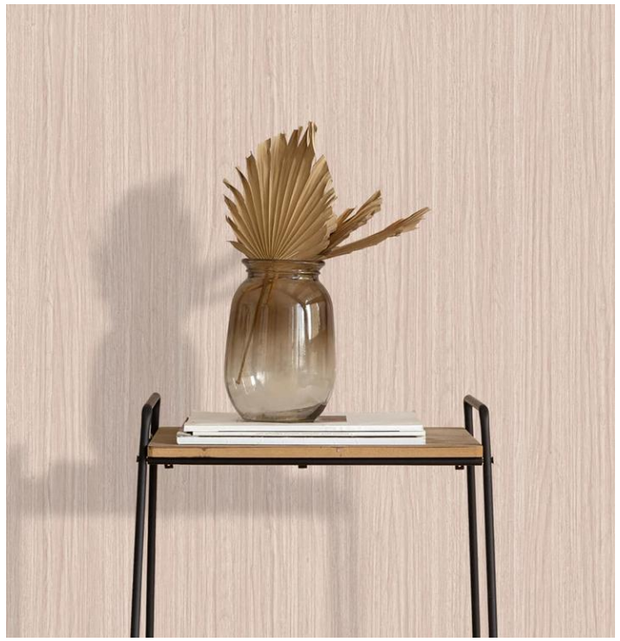



Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / Random Match
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84



EVO286-130



EVO286-222



EVO286-238



EVO286-380



EVO286-456



EVO286-554

EVO286-577



EVO286-592

EVO286-686



EVO286-712



EVO286-867



EVO286-959




EVO286-973


©Seltex Wallcoverings

Seltex
wallcoverings

Highgrove

View online

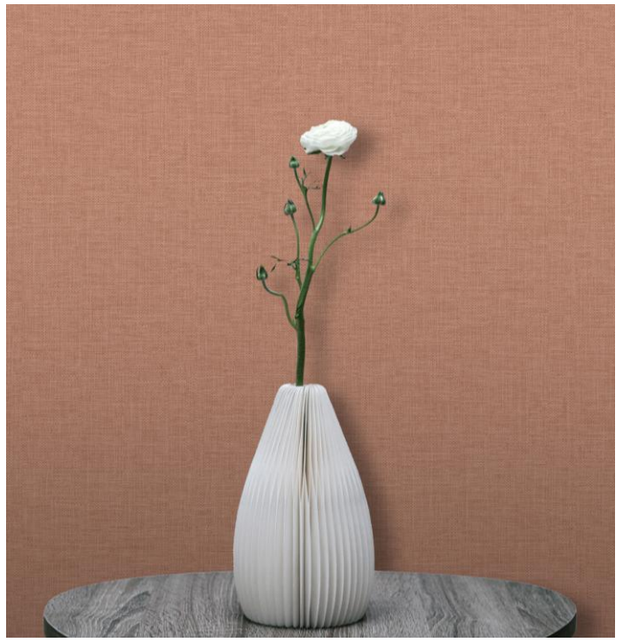

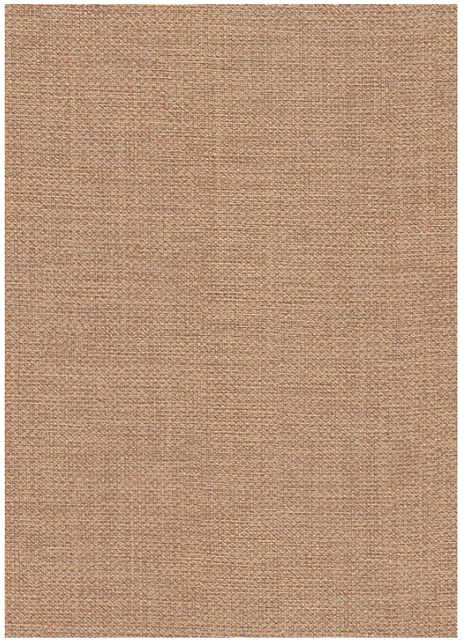

Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / Random Match
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84


EVO317-010


EVO317-035


EVO317-128


EVO317-188


EVO317-261


EVO317-332


EVO317-359


EVO317-387


EVO317-444



EVO317-473


EVO317-481


EVO317-550

EVO317-647


EVO317-685


EVO317-776


EVO317-814


EVO317-875

©Seltex Wallcoverings

Seltex
wallcoverings

Highgrove Geo

View online





Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / Random Match
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84


EVO318-130


EVO318-222


EVO318-238


EVO318-287


EVO318-380


EVO318-456


EVO318-554


EVO318-577


EVO318-589


EVO318-592


EVO318-653


EVO318-686


EVO318-712


EVO318-793


EVO318-867


EVO318-959


EVO318-973

T: +44(0)20 8211 3107 E: sales@seltex.co.uk W: seltex.co.uk

©Seltex Wallcoverings

Seltex
wallcoverings

Montreux





Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / Random Match
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84


SEL291-169


SEL291-197


SEL291-238


SEL291-279


SEL291-307


SEL291-375


SEL291-383

SEL291-399


SEL291-406


SEL291-462


SEL291-589


SEL291-705

SEL291-793


SEL291-816


SEL291-820


SEL291-884



SEL291-944


©Seltex Wallcoverings

Seltex
wallcoverings

Bellino

View online

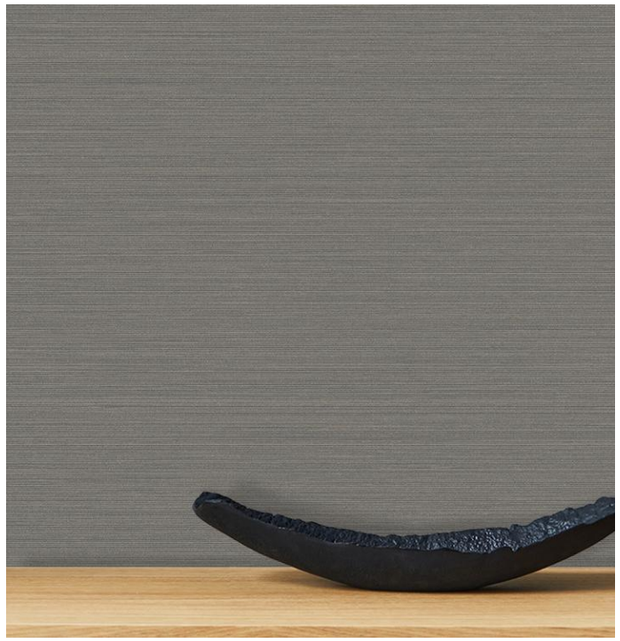

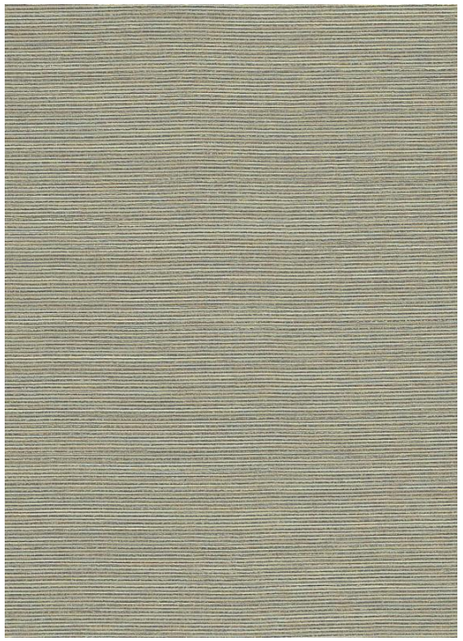

Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / Random Match
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84


EVO313-010


EVO313-035


EVO313-067


EVO313-128


EVO313-188


EVO313-261


EVO313-332


EVO313-359


EVO313-387


EVO313-444


EVO313-481


EVO313-513


EVO313-550


EVO313-647


EVO313-685


EVO313-814


EVO313-982


©Seltex Wallcoverings

Seltex
wallcoverings

Sylvan

View online



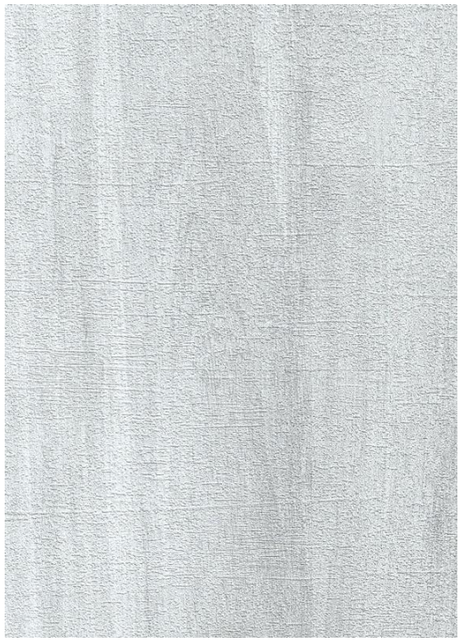

Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Non-Reverse / Random match
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84



EVO316-067



EVO316-117




EVO316-286



EVO316-307



EVO316-342



EVO316-406



EVO316-456



EVO316-513




EVO316-628



EVO316-816



EVO316-944



EVO316-982



EVO316-998

©Seltex Wallcoverings

Seltex
wallcoverings

Zürich

View online





Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / Random Match
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84



EVO292-035



EVO292-067



EVO292-117



EVO292-128



EVO292-261



EVO292-286



EVO292-342



EVO292-359



EVO292-444



EVO292-481



EVO292-513



EVO292-550

EVO292-628



EVO292-647



EVO292-685



EVO292-982



EVO292-998

©Seltex Wallcoverings

Seltex
wallcoverings

Attika

View online





Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Non-Reverse / Align at arrows
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84



EVO319-169



EVO319-197



EVO319-279



EVO319-375



EVO319-383




EVO319-399



EVO319-462



EVO319-705



EVO319-820



EVO319-884

©Seltex Wallcoverings

Seltex
wallcoverings

Basel

View online





Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / Random Match
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84



SEL290-130



SEL290-222



SEL290-287



SEL290-380



SEL290-456



SEL290-473



SEL290-554



SEL290-577



SEL290-592



SEL290-653



SEL290-686



SEL290-712



SEL290-814



SEL290-867



SEL290-875



SEL290-959



SEL290-973


T: +44(0)20 8211 3107 E: sales@seltex.co.uk W: seltex.co.uk


©Seltex Wallcoverings

Seltex
wallcoverings

Saint Moritz

View online

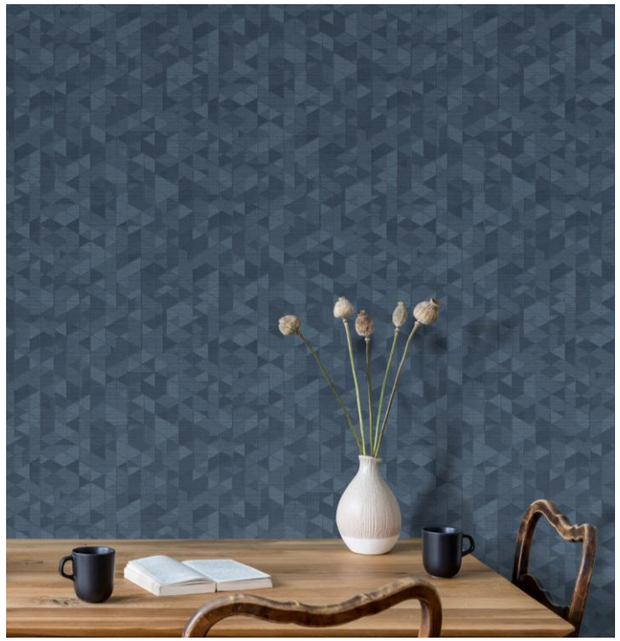

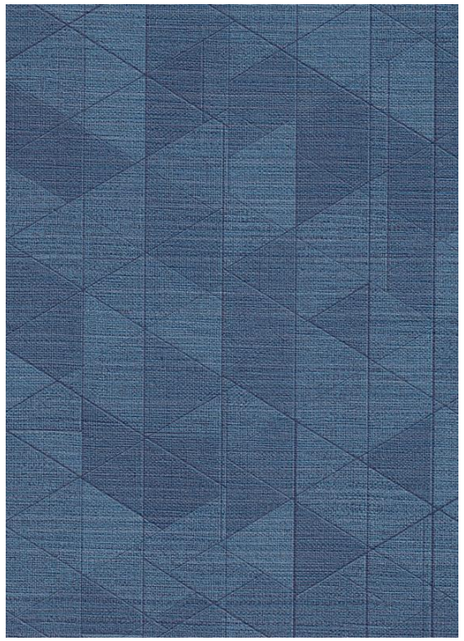

Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / V: 45.72cm H:33.66cm
Fire Rating	B-s1-d0 to BS EN 13501-1 Class A to ASTM E-84



EVO284-035




EVO284-128



EVO284-359



EVO284-444



EVO284-484

EVO284-513



EVO284-550



EVO284-647



EVO284-685



EVO284-982


©Seltex Wallcoverings

Seltex
wallcoverings

Namur

View online



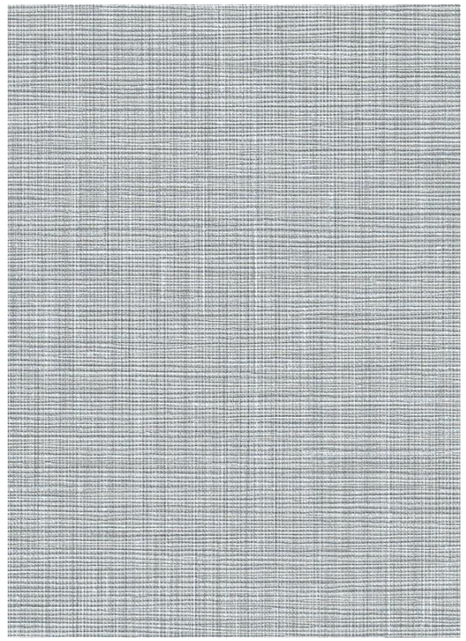

Performance Specifications	
Content	Olefin Composite
Total Weight (Avg)	452/m2
Width (approx.)	132 / 137cm
Roll Length (approx.)	27.4m
Fabric Backing	Osnaburg
Installation	Reverse Hang / Random Match
Fire Rating	B-s1-d0 to BS EN 13501-1: 2007 Class A to ASTM E-84


EVO314-130


EVO314-222


EVO314-287


EVO314-380


EVO314-456


EVO314-473


EVO314-554

EVO314-577


EVO314-592


EVO314-653


EVO314-686


EVO314-712


EVO314-776


EVO314-867


EVO314-875

EVO314-959


EVO314-973

T: +44(0)20 8211 3107 E: sales@seltex.co.uk W: seltex.co.uk

©Seltex Wallcoverings